


# Tile & Stone Installation Systems



- Surface-Preparation Products
- Shower Installation Systems
- Membrane Systems and Waterproofing Products
- Mortars and Additives
- Grouts
- Ready-to-Use Products
- Finishing and Care Products



## SUPERIOR PRODUCTS

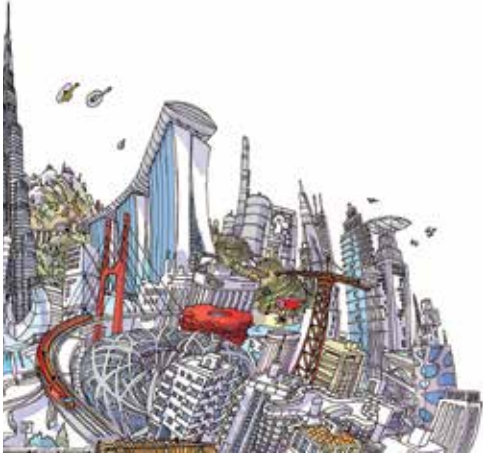

### FULL-BREADTH PRODUCT LINES

MAPEI products offer complete installation system solutions to address all your flooring, tile and concrete restoration needs from a single source.

### SUPERIOR-QUALITY PRODUCTS

MAPEI is an ISO 9001-2000 certified company. Our products are produced according to exacting standards, strictly adhering to process and procedural guidelines with documented compliance. This rigid production format is vigilantly followed to ensure that every product is produced uniformly from batch to batch.

## PROFESSIONAL SUPPORT NETWORK

### KNOWLEDGEABLE SALES FORCE

MAPEI brings you the largest, most highly trained sales force within the industry to serve your needs for product application/installation recommendations. Our sales representatives are focused on supporting you with product knowledge, product demonstrations, product information, marketing support elements and other relevant tools to help you generate sales.



### TECHNICAL EXPERTISE

An in-house Technical Services Call Center responds to customers' telephone inquiries with answers to installation challenges in real time. In addition, Regional Technical Services Field Consultants provide field support, specializing in on-site employee training and jobsite product application oversight.



### CUSTOMER SERVICE PLUS

MAPEI's standards for customer service are best-in-class. Our leadership includes such service innovations as:

- Customer-friendly, efficient processes
- One-call resolution
- Employee commitment to effective customer dialog



## INNOVATIVE RESEARCH & DEVELOPMENT

Worldwide, more than 12% of MAPEI employees are involved in the development of new technologies and product innovations, keeping our customers at the forefront of the flooring industry.

The company has taken the additional initiative of focusing its R&D efforts on environmentally sustainable solutions.



To remain on the cutting edge of innovation, MAPEI reinvests 5% of its annual revenues into researching and developing new products and technologies.

This corporate priority has produced such innovations as:

- High-Hydrated Cement Technology (HCT™), which offers high early strength, excellent workability, ultra fast curing, unmatched long-term durability to products and efflorescence-free curing.
- Easy Glide Technology™, which offers extreme ease of application, yielding a buttery consistency that reduces fatigue during troweling.
- BioBlock® technology, which helps to protect select MAPEI products from mold and mildew.
- FastTrack Ready™ products, which reduce the required steps of an installation and/or perform more quickly than current technology.

## BEST-BACKED<sup>SM</sup> WARRANTY PROGRAM

To bring it all together, MAPEI complements the industry's best products with simple, easy-to-understand requirements for comprehensive warranties — allowing you to build systems within desired warranty timeframes.



# TABLE OF CONTENTS

## Quick-Reference Charts and Guides

|   |  |
|---|--|
| 2 | Surface-Preparation Products                 |
| 3 | Waterproofing                                |
| 3 | Crack Isolation and Sound Reduction          |
| 4 | Setting Products                             |
| 5 | Grouts                                       |
| 5 | ISO 13007 Standards: Product Classifications |
| 6 | Index to Technology Logos                    |

## Surface-Preparation Products

|       |   |
|-------|---|
| 6-8   | Mud Bed, Render Mortars and Repair Systems  |
| 8     | Admixture                                   |
| 8-10  | Patching Compounds, Skimcoats and Additives |
| 10    | Bond-Promoting Primer                       |
| 10-11 | Primers for Self-Leveling                   |
| 12-13 | Self-Leveling Underlayments                 |
| 14    | Moisture Control                            |

## Shower Installation Systems

|       |  |
|-------|--|
| 15    | <i>ShowerPerfect</i> Installation Kits |
| 15-19 | <i>ShowerPerfect</i> System Components |
| 19    | <i>ShowerPerfect</i> Linear Drain      |
| 19    | <i>ShowerPerfect</i> Strainer          |

## Membrane Systems and Waterproofing Products

|       |                                     |
|-------|-------------------------------------|
| 20-21 | Waterproofing Membranes             |
| 22-23 | Crack Isolation and Sound Reduction |

## Mortars and Additives

|       |                                      |
|-------|--------------------------------------|
| 24    | Flexible Mortar Systems              |
| 25-28 | Polymer-Modified Mortars             |
| 29    | Full-Contact Mortars                 |
| 29-30 | Lightweight Polymer-Modified Mortars |
| 31    | Specialty Mortars                    |
| 32-33 | Dry-Set Mortars                      |
| 33    | Dry-Set Mortar Latex Additives       |
| 34    | Jobsite Mortar Additive              |
| 34-35 | Mastics                              |

## Grouts

|       |               |
|-------|---------------|
| 35-36 | Epoxy Grouts  |
| 36-37 | Cement Grouts |

## Ready-to-Use Products

|       |                   |
|-------|-------------------|
| 37-38 | Grouts and Mortar |
|-------|-------------------|

## Finishing and Care Products

|    |        |
|----|--------|
| 38 | Caulks |
|----|--------|

## Other

|    |                           |
|----|---------------------------|
| 40 | MAPEI Technical Institute |
|----|---------------------------|

# Surface-Preparation Products

(Pages 6-14)

| Product Name and Description        | Type of Substrate   |                         |               |                      |                          |                  |       | Application |          | Specifications |  |
|-------------------------------------|---|-------------------------|---------------|----------------------|--------------------------|------------------|-------|-------------|----------|----------------|--|
|                                     | Concrete  | Plywood (interior only) | Ceramic Tile* | VCT/Cutback Adhesive | Cement Backer Unit (CBU) | Gypsum Wallboard | Steel | Interior    | Exterior |                | Fast-Setting (or Fast-Drying)                |
| Patching Compounds                  | <b>Mapecem® Quickpatch</b><br>High-Performance, High-Flow Concrete Patch  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Planipatch®</b><br>Fast-Setting, Polymer-Modified, Cement-Based Patching Compound  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Planipatch Plus®</b><br>High-Performance Additive for <i>Planipatch</i>  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
| Mud Bed / Screeds Admixture         | <b>4 to 1™ Mud Bed Mix</b><br>Sand and Cement Mortar Mix  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>4 to 1 Mud Bed Mix with Planicrete® AC</b><br>Sand and Cement Mortar Mix, with Acrylic Latex Admixture for Mortar and Concrete               |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Mapecem Premix</b><br>Fast-Setting Screed Mortar   |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Topcem™ Premix</b><br>Ready-to-Use, Accelerated-Cure Screed  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Modified Mortar Bed</b><br>Polymer-Modified Thick-Bed and Render Mortar  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
| Bond-Promoting Primer               | <b>ECO Prim Grip™</b><br>Multipurpose, Bond-Promoting Primer  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
| Self-Levelers                       | <b>Ultraplan® Easy</b> – Featheredge to 2" (5 cm)<br>High-Performance, Easy-Preparation, Self-Leveling Underlayment                             |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Ultraplan Extreme</b> – 1/4" to 1" (6 mm to 2,5 cm)<br>Quick-Setting, Water-Resistant, High-Compressive-Strength, Self-Leveling Underlayment |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Ultraplan 1 Plus</b> – Featheredge to 1-1/2" (3,8 cm)<br>High-Performance, Quick-Setting, Self-Leveling Underlayment                         |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Novoplan® Easy Plus</b> – 1/8" to 1" (3 mm to 2,5 cm)<br>Easy-Preparation, Self-Leveling Underlayment  |                         |               |                      |                          |                  |       |             |          |                | N/A  |
|                                     | <b>Novoplan 2 Plus</b> – 1/8" to 1" (3 mm to 2,5 cm)<br>Professional Self-Leveling Underlayment   |                         |               |                      |                          |                  |       |             |          |                | N/A  |
| Waterproofing Membranes             | <b>Mapelastic® AquaDefense</b> (MAPEI's Reinforcing Fabric optional)<br>Premium Waterproofing and Crack-Isolation Membrane                      |                         |               |                      |                          |                  |       |             |          |                | ANSI A118.10, IAPMO, ANSI A118.12, ICC       |
|                                     | <b>Mapelastic 315</b> (use <i>Fiberglass Mesh</i> )<br>Professional, Cement-Based Waterproofing Membrane  |                         |               |                      |                          |                  |       |             |          |                | ANSI A118.10, IAPMO, ANSI A118.12, ASTM C627 |
|                                     | <b>Mapelastic HPG</b> (use <i>Fiberglass Mesh</i> )<br>Flexible Waterproofing and Crack-Isolation Membrane                                      |                         |               |                      |                          |                  |       |             |          |                | ANSI A118.10, IAPMO, ASTM C627               |
| Crack Isolation and Sound Reduction | <b>Mapeguard® 2</b><br>Premium Crack-Isolation and Sound-Reduction Sheet Membrane   |                         |               |                      |                          |                  |       |             |          |                | ANSI A118.12, A118.3; ASTM C627, E492-04     |
| Moisture-Reduction Barriers         | <b>Planiseal® EMB</b> (one coat)<br>Premium Epoxy Moisture Barrier for Concrete Substrates  |                         |               |                      |                          |                  |       |             |          |                | N/A  |

\* Properly prepared

See Technical Data Sheets for additional information. Test in a small area, as resins may stain or leave residue on surface.



# Waterproofing


(Pages 20-22)

| Product Name and Description  | Base    |        | Required |                 |      | Application |          | Tools |        |        | Water Immersion (long-term) | Cure Time Before Tile | Cure Time Before Flood Test | Crack Isolation      | Specifications                                    |
|---|---------|--------|----------|-----------------|------|-------------|----------|-------|--------|--------|-----------------------------|-----------------------|-----------------------------|----------------------|---|
|   | Acrylic | Cement | Fabric   | Optional Fabric | Mesh | Interior    | Exterior | Brush | Roller | Trowel |                             |                       |                             |                      |   |
| <b>Mapelastic® AquaDefense</b><br>(MAPEI's Reinforcing Fabric optional)<br>Premium Waterproofing and Crack-Isolation Membrane | ●       |        |          | ●               |      | ●           | ●        | ●     | ●      |        |                             | 30 to 50 minutes      | 12 hours                    | Up to 1/8" (3 mm)    | ANSI A118.12, ANSI A118.10, IAPMO, ICC, ASTM C627 |
| <b>Mapelastic HPG</b> (use Fiberglass Mesh)<br>Flexible Waterproofing and Crack-Isolation Membrane                            | ●       |        |          |                 | ●    | ●           |          | ●     | ●      | ●      |                             | 16 to 24 hours        | 72 hours                    | Up to 1/8" (3 mm)    | ANSI A118.10, IAPMO, ASTM C627                    |
| <b>Mapelastic 315</b> (use Fiberglass Mesh)<br>Professional, Cement-Based Waterproofing Membrane                              |         | ●      |          |                 | ●    | ●           | ●        |       |        | ●      |                             | 8 to 12 hours         | 72 hours                    | Up to 1/16" (1,5 mm) | ANSI A118.12, ANSI A118.10, IAPMO, ASTM C627      |

# Crack Isolation and Sound Reduction (Peel-and-Stick)

(Page 22-24)

| Product Name and Description  | Sound Reduction   |   | Application |          | Thickness | Crack Isolation    | Primer Required | Roll Size                  | Specifications  |
|---|---|---|-------------|----------|-----------|--------------------|-----------------|----------------------------|---|
|   | Porcelain Tile (with ceiling and 6" [15-cm] concrete floor) | Porcelain Tile (without ceiling and with 6" [15-cm] concrete floor) | Interior    | Exterior |           |                    |                 |                            |   |
| <b>Mapesonic™ 2</b><br>Premium Sound-Reduction and Crack-Isolation Sheet Membrane | 70 IIC, 66 STC  | 50 IIC, 52 STC, 21 Delta IIC  | ●           |          | 76 mils   | Up to 3/8" (10 mm) | ●               | 39" x 49.2' (99 cm x 15 m) | ANSI A118.12, ANSI A118.13 & ASTM C627 (Light Commercial) |
| <b>Mapeguard® 2</b><br>Premium Crack-Isolation and Sound-Reduction Sheet Membrane | 64 IIC, 66 STC  | 47 IIC, 52 STC, 16 Delta IIC  | ●           | ●        | 40 mils   | Up to 3/8" (10 mm) | ●               | 39.4" x 68.6' (1 x 20,9 m) | ANSI A118.12 & ASTM C627 (Extra Heavy)                    |
| <b>Mapelastic CI</b><br>Professional Crack-Isolation Membrane                     |   |   | ●           | ●        | 15 mils   | Up to 1/8" (3 mm)  |                 |                            | ANSI A118.12 & ASTM C627 (Extra Heavy)                    |

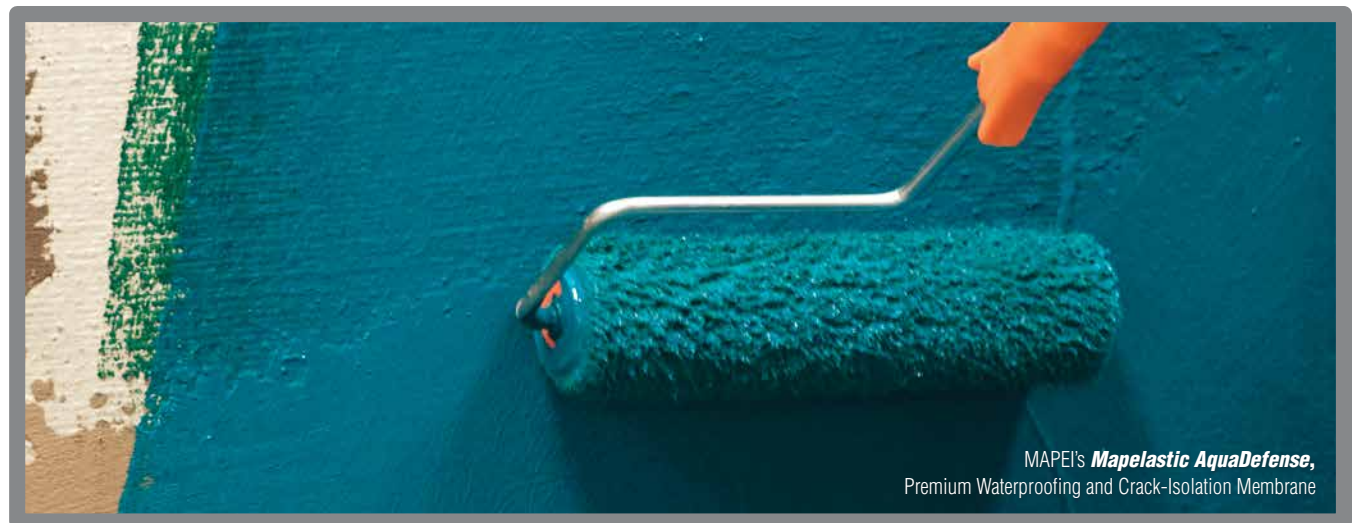

# Setting Products

(Pages 24-34)

| Product Name and Description  | Type of Substrate |                            |                   |         |              |                      |       | Type of Tile |           |                              |                                       |                       |                          | Application                       |                        |                       |              |                 |                  | ISO 13007 Classification | ANSI Standard              |
|---|-------------------|----------------------------|-------------------|---------|--------------|----------------------|-------|--------------|-----------|------------------------------|---------------------------------------|-----------------------|--------------------------|-----------------------------------|------------------------|-----------------------|--------------|-----------------|------------------|--------------------------|----------------------------|
|   | Concrete          | Cement Backer Units (CBUs) | Gypsum Wallboard* | Plywood | Ceramic Tile | VCT/Cutback Adhesive | Steel | Ceramic      | Porcelain | Stone (dimensionally stable) | 15" x 15" (38 x 38 cm) or Larger Tile | Glass and Mosaic Tile | Moisture-Sensitive Stone | Interior (residential/commercial) | Exterior (residential) | Exterior (commercial) | Fast-Setting | Water Immersion | Exterior Facades |                          |                            |
| <b>Granirapid® System</b><br>Premium, Rapid-Setting, Flexible Tile Mortar   | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     | ●                     |                          | ●                                 | ●                      | ●                     | ●            | ●               | ●                | C2FS2P2                  | A118.4F, A118.11, A118.15F |
| <b>Kerabond/Keralastic™ System</b><br>Premium, Flexible Tile Mortar   | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     | ●                     |                          | ●                                 | ●                      | ●                     |              | ●               | ●                | C2ES2P2                  | A118.4E, A118.11, A118.15E |
| <b>Kerabond® T / Keralastic™ System</b><br>Premium, Flexible Medium-Bed and Thin-Set Tile Mortar                        | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     | ●                     |                          | ●                                 | ●                      | ●                     |              | ●               | ●                | C2ES2P2                  | A118.4E, A118.11, A118.15E |
| <b>MAPEI Ultralite™ S2</b><br>Premium, Highly Deformable, Lightweight Thin-Tile Mortar with Polymer                     | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              | ●               |                  | C2ES2P2                  | A118.4E, A118.11           |
| <b>Ultraflex™ LFT™</b><br>Premium, Large-Format Tile Mortar with Polymer  | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              | ●               | ●                | C2TES1P1                 | A118.4TE, A118.11          |
| <b>Ultraflex LFT Rapid</b><br>Premium, Rapid-Setting, Large-Format Tile Mortar with Polymer                             | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              | ●               | ●                | C2TFS1P1                 | A118.4TF, A118.11          |
| <b>MAPEI Ultralite Mortar</b><br>Premium, Lightweight Tile Mortar with Polymer  | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2TES1P1                 | A118.4TE, A118.11          |
| <b>Ultracontact™ (floors only)</b><br>Premium, Full-Contact Tile Mortar with Polymer                                    | ●                 | ●                          |                   | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2EP1                    | A118.4E, A118.11           |
| <b>Ultracontact RS (floors only)</b><br>Premium, Rapid-Setting, Full-Contact Tile Mortar with Polymer                   | ●                 | ●                          |                   | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2FP1                    | A118.4F, A118.11           |
| <b>Ultraflex 3</b><br>Premium Tile Mortar with Polymer  | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              | ●               | ●                | C2ES1P1                  | A118.4E, A118.11, A118.15E |
| <b>Ultraflex RS</b><br>Premium, Rapid-Setting Tile Mortar with Polymer  | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2FS1P1                  | A118.4F, A118.11, A118.15F |
| <b>Ultraflex LHT</b><br>Large-and-Heavy-Tile Mortar with Polymer  | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2TE                     | A118.4TE, A118.11          |
| <b>MAPEI Ultralite Mortar Pro</b><br>Professional, Lightweight Tile Mortar with Polymer                                 | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C1TES1                   | A118.4TE, A118.11          |
| <b>MAPEI Ultralite S1 Quick</b><br>Premium, Rapid-Setting, Lightweight Tile Mortar with Polymer                         | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              | ●               |                  | C2TFS1P1                 | A118.4TF, A118.11          |
| <b>Ultraflex 2</b><br>Professional Tile Mortar with Polymer   | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2EP1                    | A118.4E, A118.11           |
| <b>Ultraflex 1</b><br>Standard Tile Mortar with Polymer   | ●                 | ●                          | ●                 | ●       |              |                      |       | ●            | ●         | ●                            |                                       |                       |                          | ●                                 | ●                      |                       |              |                 |                  | C2E                      | A118.4E, A118.11           |
| <b>Ultraflor™ Plus with Keraply (floors only)</b><br>Large-and-Heavy-Floor-Tile Mortar with Polymer, and Latex Additive | ●                 | ●                          |                   | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2S1                     | A118.4, A118.11            |
| <b>Ultraflor™ Plus (floors only)</b><br>Large-and-Heavy-Floor-Tile Mortar with Polymer                                  | ●                 | ●                          |                   |         |              |                      |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              |                 |                  | C2                       | A118.4                     |
| <b>Kerapoxy® 410</b><br>Premium, 100%-Solids Epoxy Setting Mortar   | ●                 | ●                          | ●                 | ●       | ●            | ●                    |       | ●            | ●         | ●                            | ●                                     |                       | ●                        | ●                                 | ●                      | ●                     |              | ●               |                  | R2                       | A118.3                     |
| <b>Adesilex™ P10 with Keraply®</b><br>Premium Glass Tile Mortar with Polymer, and Latex Additive                        | ●                 | ●                          | ●                 | ●       | ●            |                      |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      | ●                     |              | ●               |                  | C2TES1P1                 | A118.4TE, A118.11          |
| <b>Adesilex P10</b><br>Premium Glass Tile Mortar with Polymer   | ●                 | ●                          | ●                 |         |              |                      |       | ●            | ●         | ●                            | ●                                     |                       |                          | ●                                 | ●                      |                       |              |                 |                  | C2TE                     | A118.4TE                   |
| <b>Type 1™</b><br>Professional Tile Adhesive – walls 12" x 12" (30 x 30 cm), floors 6" x 6" (15 x 15 cm)                | ●                 | ●                          |                   | ●       |              |                      |       | ●            | ●         |                              |                                       |                       |                          | ●                                 |                        |                       |              |                 |                  | D1TE                     | A136.1, Type 1             |
| <b>Ker® 909</b> Professional Tile Adhesive – walls 8" x 8" (20 x 20 cm), floors 6" x 6" (15 x 15 cm)                    | ●                 | ●                          | ●                 | ●       |              |                      |       | ●            | ●         |                              |                                       |                       |                          | ●                                 |                        |                       |              |                 |                  | D1TE                     | A136.1, Type 1             |

\* Properly prepared

# Grouts

(Pages 35-37)

| Product Name and Description   | Application                       |                                   |                       |                 |            |             |                     |                            |                                 | ISO 13007 Classification | ANSI Standard   |
|--|-----------------------------------|-----------------------------------|-----------------------|-----------------|------------|-------------|---------------------|----------------------------|---------------------------------|--------------------------|-----------------|
|  | Interior (residential/commercial) | Exterior (residential/commercial) | Exterior (commercial) | Water Immersion | Industrial | Fast-Curing | Chemical Resistance | Grout Joints < 1/8" (3 mm) | Grouting Polished Stones/Marble |                          |                 |
| <b>Kerapoxy® CQ</b><br>Premium Epoxy Grout and Mortar with Color-Coated Quartz               | ●                                 | ●                                 | ●                     | ●               | ●          |             | ●                   | ●                          | ●                               | R2/RG                    | A118.3          |
| <b>Kerapoxy IEG CQ</b><br>100%-Solids, Industrial-Grade Epoxy Grout with Color-Coated Quartz | ●                                 | ●                                 | ●                     | ●               | ●          | ●           | ●                   |                            |                                 | RG                       | A118.3          |
| <b>Kerapoxy</b><br>Premium Epoxy Grout and Mortar  | ●                                 | ●                                 | ●                     | ●               | ●          |             | ●                   | ●                          | ●                               | R2/RG                    | A118.3          |
| <b>Ultracolor® Plus</b><br>Premium, Rapid-Setting Sanded Grout with Polymer                  | ●                                 | ●                                 | ●                     | ●               |            | ●           |                     | ●                          |                                 | CG2WAF                   | A118.6, A118.7  |
| <b>Keracolor® S</b><br>Premium Sanded Grout with Polymer                                     | ●                                 | ●                                 | ●                     | ●               |            |             |                     |                            |                                 | CG2WA                    | A118.6          |
| <b>Keracolor U</b><br>Premium Unsanded Grout with Polymer                                    | ●                                 | ●                                 | ●                     | ●               |            |             |                     | ●                          | ●                               | CG2WA                    | A118.6          |
| <b>MAPEI Flexcolor™ CQ</b><br>Ready-to-Use Grout with Color-Coated Quartz                    | ●                                 | ●                                 | ●                     |                 |            |             | ●                   | ●                          | ●                               |                          | A118.3*, A118.6 |

See Technical Data Sheets for additional information. Test in a small area, as resins may stain or leave residue on surface.

\* Chemical resistance portion of A118.3

## ISO 13007 Standards: Product Classifications

| Adhesives | TYPES                                      | CLASSES                    | SPECIAL CHARACTERISTICS  |
|-----------|--|----------------------------|--|
|           | C = Cementitious (Thin-set mortars)        | 1 = Normal<br>2 = Improved | F = Fast-setting<br>T = Slip-resistant<br>E = Extended open time<br>S1 = Deformable<br>S2 = Highly deformable<br>P1 = Plywood adhesion<br>P2 = Improved plywood adhesion |
|           | D = Dispersion (Mastics)                   | 1 = Normal<br>2 = Improved | A = Accelerated-drying dispersion adhesive<br>F = Fast-drying<br>T = Slip-resistant<br>E = Extended open time  |
|           | R = Reaction resin (Epoxies and urethanes) | 1 = Normal<br>2 = Improved | T = Slip-resistant   |
| Grouts    | TYPES                                      | CLASSES                    | SPECIAL CHARACTERISTICS  |
|           | CG = Cementitious grouts                   | 1 = Normal<br>2 = Improved | F = Fast-setting<br>A = High abrasion resistance<br>W = Reduced water absorption   |
|           | RG = Reaction resin grouts                 | —                          | Higher performance characteristics than improved cementitious grouts   |

## Helping you choose the right products more precisely

The tile and stone installation industry has entered a new age that is bringing simplicity and consistency to the architect's task of specifying the right product for the right job. The ISO 13007 Standards for Adhesives and Grouts make it easier for architects to describe what characteristics they want in the installation products they select for use under the conditions affecting each particular project. The objectivity that architects can now include in their specifications will reverberate through the entire installation network.

The ISO 13007 Standards employ a classification coding system of letters and numbers that indicates to architects, contractors, installers and distributors exactly which adhesive and grout performance requirements must be met for a particular job. MAPEI is displaying the coding on its packaging and literature so customers can easily see which product(s) they should purchase to meet their needs. The chart at the left demonstrates the ease of using this coding system.

# Index to Technology Logos



GREEN INNOVATION

Products developed with MAPEI's "green innovation" are LEED-compliant, helping to contribute valuable points toward LEED-certified projects.



MAPEI's BioBlock technology has been added to select products to help protect them from mold and mildew.



MAPEI's FastTrack Ready products reduce the required steps of an installation and/or perform more quickly than current technology.



Products developed with Ultralite Technology are lightweight, high-performing and easy to use, and provide extended coverage at the same product weight as traditional products.



Products featuring High-Hydrated Cement Technology (HCT™) offer high early strength, excellent workability, ultra fast curing, unmatched long-term durability and efflorescence-free curing.



MAPEI mortars with Easy Glide Technology offer extreme ease of application, yielding a buttery consistency that reduces fatigue during troweling.




VERIFIED BY  
SCS certified.

Green Squared® is a multi-attribute, industry-wide standard that underscores the North American tile industry's commitment to sustainable manufacturing of tile and installation products.



Universal Color Formula mortars are ideal for installing light-colored and translucent tile, stone and grout in manner equal to typical white mortars.

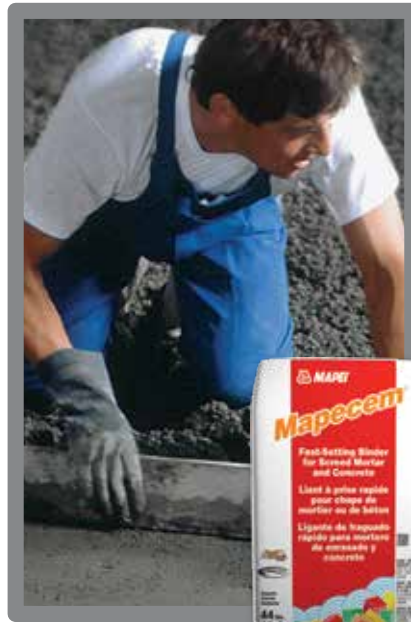

## Mapecem®

### Fast-Setting Binder for Screed Mortar and Concrete

Mapecem is a high-performance, shrinkage-compensated binder that is added to select aggregates with water to create a fast-curing, high-strength interior mortar or concrete for screeding. Aggregate must be added to this product before placement.

|        | Product Code | Packaging            |
|--------|--------------|----------------------|
| U.S.   | 2060040      | Bag: 44 lbs. (20 kg) |
| Canada | 206004021    | Bag: 44 lbs. (20 kg) |

## Mapecem® Premix

### Fast-Setting Screed Mortar

Mapecem Premix is a fast-setting, premixed cement-based mortar for concrete repairs and subfloor preparation work. Mixed exclusively with water, Mapecem Premix provides an easy-to-use, high-compressive-strength, fast-setting mortar that sets completely within 24 hours without shrinkage cracks. When properly used, Mapecem Premix will allow installation of ceramic tile and natural-stone flooring after only 3 to 4 hours and installation of floor covering (such as vinyl, wood, rubber, linoleum and carpet) after 16 to 18 hours.

|        | Product Code | Packaging             |
|--------|--------------|-----------------------|
| U.S.   | 2060051      | Bag: 50 lbs. (22,7kg) |
| Canada | 2060021      | Bag: 50 lbs. (22,7kg) |







### Topcem™ Premix

#### Ready-to-Use, Accelerated-Cure Screed

*Topcem Premix* is a ready-to-use mortar requiring only the addition of water. *Topcem Premix* is suitable in both bonded and unbonded, interior and exterior applications. *Topcem Premix* has an accelerated cure, allowing for installation of ceramic flooring in 24 hours after placement, and nonbreathable flooring systems in 48 hours. *Topcem Premix* can easily be screeded or sloped, and has the workability and working time of conventional mortars but with a much faster curing time. It is ideal for interior or exterior repairs such as filling trenches, re-sloping balconies, and forming screeds that may or may not receive subsequent flooring installations.

|               | Product Code      | Packaging  |
|---------------|-------------------|--|
| <b>U.S.</b>   | 15750             | Bag: 50 lbs. (22,7 kg)                           |
| <b>Canada</b> | 15740000<br>15750 | Bag: 40 lbs. (18,1 kg)<br>Bag: 50 lbs. (22,7 kg) |



### Modified Mortar Bed

#### Polymer-Modified Thick-Bed and Render Mortar

*Modified Mortar Bed* is a pre-blended, cement-based, polymer-modified thick-bed and render mortar that includes a blend of select aggregates. Rather than requiring the use of a latex additive, it only needs mixing with water to produce a thick-bed mortar of exceptional strength.

|                      | Product Code | Packaging             |
|----------------------|--------------|-----------------------|
| <b>U.S. / Canada</b> | 0376027      | Bag: 60 lbs. (27,2kg) |



### 4 to 1™ Mud Bed Mix

#### Sand and Cement Mortar Mix

*4 to 1* is a pre-blended mixture of finely graded sand and Portland cement used for thick-bed mortar installations. *4 to 1* flattens and levels an existing substrate before the installation of tile and stone.

|               | Product Code | Packaging              |
|---------------|--------------|------------------------|
| <b>U.S.</b>   | 14155000     | Bag: 55 lbs. (24,9 kg) |
| <b>Canada</b> | 1415500021   | Bag: 55 lbs. (24,9 kg) |





**Mapelath™**

**Synthetic Lath**

*Mapelath* is a lightweight, noncorroding, alkali-resistant synthetic lath used as a substitute for traditional metal lath. It is lighter and easier to work with.



**Planicrete® AC**

**Acrylic Latex Admixture for Mortar and Concrete**

*Planicrete AC* is a one-component, concentrated, liquid latex admixture used to enhance the performance of cementitious repair mortars, plasters, stuccos, concrete mixes and toppings for the restoration of horizontal, vertical and overhead concrete; concrete masonry units (CMUs); and masonry surfaces.



**Planiprep™ SC**

**High-Performance, Fiber-Reinforced Skimcoating Compound**

*Planiprep SC* is a high-performance, polymer-modified, fiber-reinforced, cement-based skimcoating and patching compound. Use *Planiprep SC* to skimcoat and smooth minor surface variations and defects on common substrates. *Planiprep SC* creates a strong, durable surface ready for almost any floor application. Its unique formulation mixes easily with water and produces an easy-to-apply patching compound. Rapid-setting *Planiprep SC* allows for fast-track flooring installations in 30 to 60 minutes after application, depending on thickness and environmental conditions.

|               | Product Code | Packaging                       |
|---------------|--------------|---------------------------------|
| <b>U.S./</b>  | 02702000     | Roll: 27" x 75' (0.69 x 22.9 m) |
| <b>Canada</b> | 02702001     | Roll: 27" x 25' (0.69 x 7.62 m) |

|               | Product Code | Packaging                   |
|---------------|--------------|-----------------------------|
| <b>U.S./</b>  | 7013004      | Jug: 1 U.S. gal. (3,79 L)   |
| <b>Canada</b> | 7013020      | Pail: 5 U.S. gals. (18,9 L) |

|               | Product Code | Packaging              |
|---------------|--------------|------------------------|
| <b>U.S./</b>  | 37411        | Bag: 10 lbs. (4,54 kg) |
| <b>Canada</b> |              |                        |





### Planiprep™ FF

#### Premium Skimcoating and Patching Compound

*Planiprep FF* is a feathered-finish, highly engineered, polymer-modified, fiber-reinforced cement-based skimcoating and patching compound. Use *Planiprep FF* to patch or skimcoat minor surface defects on virtually any substrate, creating a strong, durable, high-compression-strength surface ready for almost any floor application.

### Planipatch®

#### Fast-Setting, Polymer-Modified, Cement-Based Patching Compound

*Planipatch* is an ultra fast-drying, self-curing, polymer-modified, cement-based patching compound that rapidly develops high compressive strength. When *Planipatch* is mixed with *Planipatch Plus*®, the *Planipatch Plus* System can be used as an embossing leveler or as a patch to fill voids over properly prepared vinyl sheet goods, vinyl composition tile (VCT) and cement terrazzo before the direct glue-down installation of floor coverings.

### Planipatch Plus®

#### High-Performance Additive for *Planipatch*®

*Planipatch Plus* is an acrylic latex additive for use with *Planipatch*. When *Planipatch* is mixed with *Planipatch Plus*, the *Planipatch Plus* System can be used as an embossing leveler or as a patch to fill voids over properly prepared vinyl sheet goods, vinyl composition tile (VCT) and cement terrazzo before the direct glue-down installation of floor coverings.

|                         | Product Code | Packaging              |
|-------------------------|--------------|------------------------|
| <b>U.S./<br/>Canada</b> | 14410000     | Bag: 10 lbs. (4,54 kg) |

|               | Product Code | Packaging                      |
|---------------|--------------|--------------------------------|
| <b>U.S.</b>   | 0080045      | Bag in pail: 45 lbs. (20,4 kg) |
|               | 0080025      | Bag: 25 lbs. (11,3 kg)         |
|               | 0080010      | Bag: 10 lbs. (4,54 kg)         |
| <b>Canada</b> | 10922000     | Bag: 22 lbs. (9,98 kg)         |
|               | 10910000     | Bag: 10 lbs. (4,54 kg)         |
|               | 10940000     | Bag: 4.4 lbs. (2,0 kg)         |

|                         | Product Code | Packaging                   |
|-------------------------|--------------|-----------------------------|
| <b>U.S./<br/>Canada</b> | 7050005      | Pail: 5 U.S. gals. (18,9 L) |
|                         | 7050001      | Jug: 1 U.S. gal. (3,79 L)   |







### Mapecem® Quickpatch

#### High-Performance, High-Flow Concrete Patch

*Mapecem Quickpatch* is a versatile, fast-setting, cementitious material used for the patching of interior/exterior concrete surfaces including concrete floors, driveways, sidewalks and concrete pads. *Mapecem Quickpatch* features extraordinary ease of placement, with a variable water ratio and outstanding workability. Light gray *Mapecem Quickpatch* can be applied from featheredge to 3" (7,5 cm) for ramping or filling. That makes it ideal for restoring weathered, damaged concrete surfaces to a uniform, superior-wearing and better-than-new appearance. When used for horizontal substrate repair before application of self-leveling underlayments, *Mapecem Quickpatch* sets fast for easy and cost-efficient repairs, minimizing jobsite turnaround time.

|               | Product Code | Packaging              |
|---------------|--------------|------------------------|
| <b>U.S.</b>   | 10510000     | Bag: 10 lbs. (4,54 kg) |
|               | 10525000     | Bag: 25 lbs. (11,3 kg) |
|               | 10550        | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> | 1051000021   | Bag: 10 lbs. (4,54 kg) |
|               | 10525000     | Bag: 25 lbs. (11,3 kg) |
|               | 10550        | Bag: 50 lbs. (22,7 kg) |

### ECO Prim Grip™

#### Multipurpose, Bond-Promoting Primer

*ECO Prim Grip* is a ready-to-use, low-VOC, synthetic resin-based primer with bond-promoting silica aggregates suspended in a dispersion. It enhances the performance and adhesion of mortars to existing ceramics and difficult-to-bond-to substrates. Plus, it improves bonding of self-leveling underlayments (SLUs) and bonds of render coats over cementitious substrates. Suitable for a wide variety of substrates, *ECO Prim Grip* combines excellent versatility with an easy, low-odor application.

|               | Product Code | Packaging                     |
|---------------|--------------|-------------------------------|
| <b>U.S./</b>  | 36153000     | Pail: 1 U.S. gal. (3,79 L)    |
| <b>Canada</b> | 36163000     | Pail: 3.5 U.S. gals. (13,2 L) |

### Primer T™

#### All-Purpose Primer for Self-Leveling Underlayments

*Primer T* is a low-VOC, water-based acrylic primer that enhances the performance and adhesion of self-leveling underlayments (SLUs) on nonabsorbent surfaces such as ceramic tile, vinyl composition tile (VCT), epoxy moisture barriers and adhesive residue, as well as profiled, absorbent surfaces. Suitable for a wide variety of substrates, *Primer T* combines excellent versatility with an easy, low-odor application.

|               | Product Code | Packaging                  |
|---------------|--------------|----------------------------|
| <b>U.S./</b>  | 36691        | Jug: 1 U.S. qt. (946 mL)   |
| <b>Canada</b> | 36657        | Jug: 2 U.S. gals. (7,57 L) |







### Primer E™

#### High-Performance, 100%-Solids Epoxy Primer

*Primer E* is a two-component, 100%-solids epoxy primer and bonding agent designed for MAPEI self-leveling underlayments when using a sand broadcast method. *Primer E* is the most effective method for bonding to nonporous, dense substrates before installing self-leveling underlayments subject to high stress. *Primer E*'s low viscosity makes installation fast and easy, and provides excellent penetration into the substrate and therefore a tenacious bond.

|               | Product Code | Packaging                                 |
|---------------|--------------|---|
| <b>U.S./</b>  | 36564        | Part A, Pail:<br>2.06 U.S. gals. (7.80 L) |
| <b>Canada</b> | 36553        | Part B, Jug:<br>0.94 U.S. gals. (3.56 L)  |



### Primer L™

#### Advanced-Technology, Acrylic Latex Primer for Concrete

*Primer L* is a concentrated, solvent-free acrylic primer used before the installation of underlayments. It is green for easy identification. *Primer L* improves the bond between a properly prepared and profiled concrete substrate, and a self-leveling underlayment. *Primer L* can also be used as a primer for gypsum-based underlayments and patches.

|               | Product Code | Packaging                   |
|---------------|--------------|-----------------------------|
| <b>U.S./</b>  | 36053000     | Jug: 1 U.S. gal. (3,79 L)   |
| <b>Canada</b> | 36068000     | Pail: 5 U.S. gals. (18,9 L) |



### Primer WE™

#### Water-Based Epoxy Primer

*Primer WE* is a two-component, polymer-modified, water-based epoxy primer for enhanced adhesion to nonporous substrates before the application of MAPEI self-leveling materials. It improves adhesion over smooth, nonabsorbent and difficult-to-bond-to substrates such as properly prepared ceramic tile, epoxy moisture barriers, cement-based terrazzo, old cutback adhesive residue and approved plywood subfloors.

|               | Product Code | Packaging                           |
|---------------|--------------|-------------------------------------|
| <b>U.S./</b>  | 45457000     | Kit: 2 U.S. gals. (7,57 L)          |
| <b>Canada</b> | 45468000     | Part A, Pail: 5 U.S. gals. (18,9 L) |
|               | 45568000     | Part B, Pail: 5 U.S. gals. (18,9 L) |



# Self-Leveling Underlayments



## Planitex™ SL 35

### Engineered, Gypsum Self-Leveling Underlayment

#### For Professional Use

Planitex SL 35 is a gypsum-based, self-leveling underlayment with an exceptionally smooth, hard surface for use in dry interior residential and commercial areas. Planitex SL 35 is designed for application at depths of 1/4" to 3" (6 mm to 7,5 cm) and provides an excellent substrate for floor coverings such as rubber, sheet vinyl and vinyl composition tile (VCT). Planitex SL 35 can be used to cover radiant or in-floor heating systems. Its impressive compressive and flexural strengths allow it to support light wheeled traffic and light commercial activity.

## Novoplan® 2 Plus

### Professional Self-Leveling Underlayment

Novoplan 2 Plus is a high-strength, self-leveling cement-based underlayment and repair mix with quicker curing time, for interior concrete and engineer-approved floors.

## Novoplan® Easy Plus

### Easy-Preparation, Self-Leveling Underlayment

Novoplan Easy Plus is an improved, high-strength, self-leveling, calcium-aluminate-based underlayment and repair mix for interior concrete and engineer-approved floors. Its unique formulation allows for direct application on substrates that are clean, securely bonded and properly primed.

|             | Product Code | Packaging              |
|-------------|--------------|------------------------|
| U.S./Canada | 117350       | Bag: 50 lbs. (22,7 kg) |

|             | Product Code | Packaging              |
|-------------|--------------|------------------------|
| U.S./Canada | 1785156      | Bag: 50 lbs. (22,7 kg) |

|             | Product Code | Packaging              |
|-------------|--------------|------------------------|
| U.S./Canada | 2731923      | Bag: 50 lbs. (22,7 kg) |





### Ultraplan® 1 Plus

#### High-Performance, Quick-Setting, Self-Leveling Underlayment

*Ultraplan 1 Plus* is an HCT™ (High-Hydrated Cement Technology)-based, quick-setting, self-leveling, self-drying underlayment and repair mix for interior concrete and engineer-approved floors. *Ultraplan 1 Plus* has high strength and is abrasion-resistant, able to withstand light foot traffic after 2 to 3 hours and vehicular rubber-wheel traffic after 3 days.

### Ultraplan® Easy

#### High-Performance, Easy-Preparation, Self-Leveling Underlayment

*Ultraplan Easy* is an HCT™ (High-Hydrated Cement Technology)-based, quick-setting, self-leveling underlayment that typically requires only a clean, soundly bonded substrate before application. Typically requiring reduced surface preparation, *Ultraplan Easy* provides lower installation costs and fast turnaround on jobsites. It features high strength and is able to withstand light foot traffic after 2 to 3 hours of installation.

### Ultraplan® Extreme

#### Quick-Setting, Water-Resistant, High-Compressive-Strength, Self-Leveling Underlayment


*Ultraplan Extreme* is an advanced hydraulic, cement-based, quick-setting, self-leveling compound designed for fast-track underlayment applications. It is especially formulated for the resurfacing of interior horizontal surfaces where environmental controls are not in place or the building is not totally closed in. *Ultraplan Extreme* is not affected by exposure to water or freezing temperatures. *Ultraplan Extreme* has no moisture vapor emission limitations and can be installed without testing on properly prepared concrete substrates. It is the self-leveling compound of choice for use under moisture-controlling adhesive systems and epoxy moisture barriers.

|             | Product Code | Packaging              |
|-------------|--------------|------------------------|
| U.S./Canada | 17350000     | Bag: 50 lbs. (22,7 kg) |

|             | Packaging |                        |
|-------------|-----------|------------------------|
| U.S./Canada | 24350000  | Bag: 50 lbs. (22,7 kg) |

|             | Product Code | Packaging                       |
|-------------|--------------|---------------------------------|
| U.S./Canada | 16551        | Bag: 50 lbs. (22,7 kg)          |
|             | 16590        | Super sack: 500 lbs. (227 kg)   |
|             | 16594        | Super sack: 1,000 lbs. (454 kg) |
|             | 16595        | Super sack: 2,000 lbs. (907 kg) |



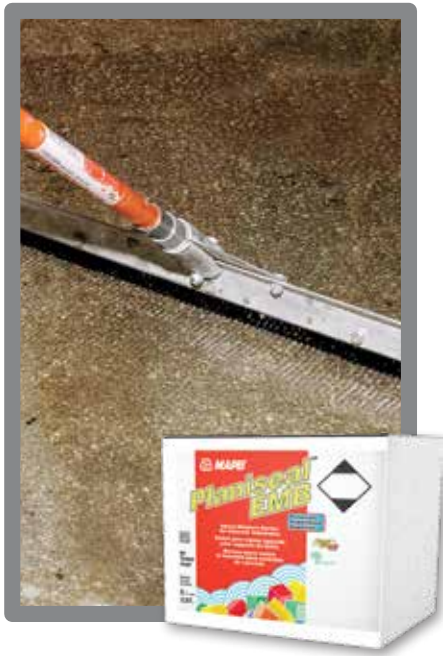

**Planiseal® EMB**

**Premium Epoxy Moisture Barrier for Concrete Substrates**

*Planiseal EMB* is a high-performance, 100%-solids, two-part epoxy, one-coat moisture barrier system for concrete slabs that exhibit moisture vapor emission rates (MVERs) up to 25 lbs. per 1,000 sq. ft. (11,3 kg per 92,9 m<sup>2</sup>) per 24 hours and reduces transmission rates to less than 3 lbs. (1,36 kg). *Planiseal EMB*'s unique formulation penetrates into the concrete substrate while creating a solid film layer on the surface for the ultimate in moisture transmission reduction.

|                    | Product Code | Packaging                  |
|--------------------|--------------|----------------------------|
| <b>U.S./Canada</b> | 46257        | Kit: 2 U.S. gals. (7,57 L) |



**Planiseal® VS**

**Alkali-Resistant, Epoxy Moisture-Reduction Barrier**

*Planiseal VS* is an alkali-resistant, two-component, 100%-solids epoxy coating that effectively stops moisture-related problems with floor coverings. In addition, *Planiseal VS* expedites floor-covering installations by eliminating the traditional wait time required for new concrete slabs to reach moisture levels suitable for installations.

|                    | Product Code | Packaging                              |
|--------------------|--------------|--|
| <b>U.S./Canada</b> | 46364        | Part A, Pail: 2.20 U.S. gals. (8,33 L) |
|                    | 46353        | Part B, Jug: 0.8 U.S. gal. (3,03 L)    |



**Planiseal® VS Fast**

**Fast-Track, Alkali-Resistant, Epoxy Moisture-Reduction Barrier**

*Planiseal VS Fast* is a fast-curing, alkali-resistant, two-component, 100%-solids epoxy coating that effectively stops moisture-related problems over concrete that impact floor coverings. In addition, it significantly expedites floor installations by eliminating the traditional wait time required for new concrete slabs to reach moisture levels suitable for floor-covering installation.

|                    | Product Code | Packaging                        |
|--------------------|--------------|----------------------------------|
| <b>U.S./Canada</b> | 46964        | Part A, 1.97 U.S. gals. (7,46 L) |
|                    | 46953        | Part B, 1 U.S. gal. (3,79 L)     |







Mapelastic AquaDefense  
sold separately



**ShowerPerfect™  
SM Installation Kit**

**Shower Installation Kit Designed for  
Mapelastic™ WSM Waterproofing Sheet  
Membrane**

ShowerPerfect SM Installation Kit includes waterproofing components for combination with Mapelastic WSM sheet membrane, which is also included. The ShowerPerfect Installation System is ideal for tub-to-shower conversions for commercial, light commercial and residential uses in hotels, hospitality facilities, institutions, dormitories, condominiums, single-family residences, etc. This convenient kit approach includes 2 ShowerPerfect Pre-Sloped Panels, a ShowerPerfect Drain Support Frame, a ShowerPerfect Curb, 4 ShowerPerfect Inside Corners, 1 tube of ShowerPerfect Hybrid Sealant, 2 ShowerPerfect SM U-Shaped Curb Covers, 5 ShowerPerfect Shower Curb Lag Screws and a roll of Mapelastic WSM sheet membrane.

**ShowerPerfect™  
LM Installation Kit**

**Shower Installation Kit Designed for  
Mapelastic™ AquaDefense Waterproofing  
Liquid Membrane**

ShowerPerfect LM Installation Kit includes waterproofing components for combination with Mapelastic AquaDefense liquid membrane. The ShowerPerfect Installation System is ideal for tub-to-shower conversions for commercial, light commercial and residential uses in hotels, hospitality facilities, institutions, dormitories, condominiums, single-family residences, etc. This convenient kit approach includes 2 ShowerPerfect Pre-Sloped Panels, a ShowerPerfect Drain Support Frame, a ShowerPerfect Curb, 4 ShowerPerfect LM Inside Corners, 2 ShowerPerfect LM U-Shaped Curb Covers, 5 ShowerPerfect Shower Curb Lag Screws and a roll of Reinforcing Fabric.

**ShowerPerfect™  
Pre-Sloped Panel**

**Structural-Foam, Pre-Formed, Pre-Sloped  
Panel**

ShowerPerfect Pre-Sloped Panel is made of high-strength, 100%-recyclable, patent-pending structural foam containing 28% recycled content. The lightweight, easy-to-handle, 16" x 52" (41 x 132 cm) panel is pre-sloped to meet the 1/4" per sq. ft. (6 mm per 0,09 m<sup>2</sup>) minimum slope requirement from perimeter to drain per published industry standards. The ShowerPerfect Pre-Sloped Panel is available in kits or separately to fit standard showers with interior shower compartment dimensions from 26" x 32" to 36" x 61" (66 x 81 cm to 91 x 155 cm) in width/length. ShowerPerfect Pre-Sloped Panel components are formed with interlocking channels to support quick installation and can be easily cut, allowing for convenient customization on the jobsite.

|                 | Product Code | Packaging     |
|-----------------|--------------|---------------|
| U.S./<br>Canada | 10110        | Large kit box |

|                 | Product Code | Packaging     |
|-----------------|--------------|---------------|
| U.S./<br>Canada | 10106        | Large kit box |

|                 | Product Code | Packaging    |
|-----------------|--------------|--------------|
| U.S./<br>Canada | 10113        | Single units |



Moisture Control  
ShowerPerfect Installation Kits  
ShowerPerfect System Components



**ShowerPerfect™  
Drain Support Frame**

**Structural-Foam, Pre-Formed Framing  
Support for Drain Assembly**

*ShowerPerfect* Drain Support Frame is made of high-strength, 100%-recyclable, patent-pending structural foam containing 28% recycled content. The lightweight, easy-to-handle, 32" x 12" (81 x 30 cm) drain support frame is pre-sloped to meet the 1/4" per sq. ft. (6 mm per 0,09 m<sup>2</sup>) minimum slope requirement from perimeter to drain per published industry standards. The *ShowerPerfect* Drain Support Frame is available in kits or separately to fit standard showers with interior shower compartment dimensions from 26" x 32" to 36" x 61" (66 x 81 cm to 91 x 155 cm) in width/length. Drain support frames can be easily cut, allowing for convenient customization on the jobsite while providing a simple, solid solution for supporting the drain assembly. The *ShowerPerfect* Drain Support Frame is formed with interlocking channels to support quick installation and a locking connection with *ShowerPerfect* Pre-Sloped Panels, as part of the *ShowerPerfect* shower installation system.

|                         | Product Code | Packaging    |
|-------------------------|--------------|--------------|
| <b>U.S./<br/>Canada</b> | 10109        | Single units |



**ShowerPerfect™ Curb**

**Structural-Foam, Pre-Formed Shower  
Curb**

*ShowerPerfect* Curb is made of high-strength, 100%-recyclable, patent-pending structural foam containing 28% recycled content. The lightweight, easy-to-handle curb has length/width/height measurements of 61" x 2-1/2" x 3-1/2" (155 x 6,3 x 8,9 cm). *ShowerPerfect* Curb offers quick installation and can be easily cut, allowing for convenient customization on the jobsite. Install the curb with a MAPEI polymer-modified mortar, using *ShowerPerfect* Curb Lag Screws to position the curb while the mortar is curing.

|                         | Product Code | Packaging    |
|-------------------------|--------------|--------------|
| <b>U.S./<br/>Canada</b> | 10103        | Single units |




**ShowerPerfect™  
LM Inside Corners**

**Pre-Formed, Nonwoven Inside Corners**

*ShowerPerfect* LM Inside Corners are made of strong, absorbent polyester reinforcing fabric for use with *Mapelastic™ AquaDefense* waterproofing membrane. Pre-formed inside corners allow for fast and easy preparation of shower corners and wet areas that will receive tile. Utilize *ShowerPerfect* Inside Corners with *Mapelastic AquaDefense* for the areas where shower curbs, shower walls and pre-sloped panels meet in the *ShowerPerfect* shower installation system.

|                         | Product Code | Packaging  |
|-------------------------|--------------|------------|
| <b>U.S./<br/>Canada</b> | 10104        | Box of 100 |

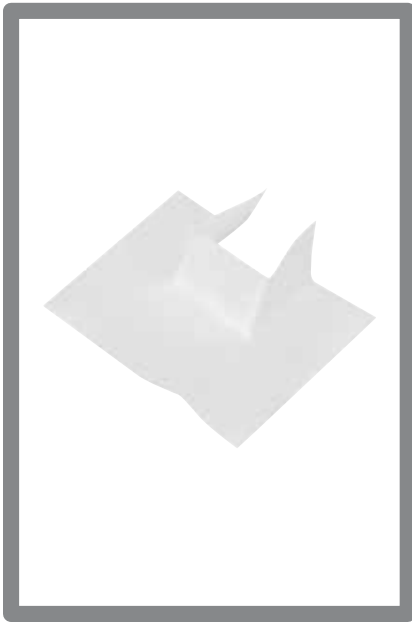

**ShowerPerfect™  
LM U-Shaped Curb Covers**

**Pre-Formed, Nonwoven, U-Shaped Curb Covers**

*ShowerPerfect* LM U-Shaped Curb Covers are made of a strong, absorbent, polyester reinforcing fabric for use with *Mapelastic™ AquaDefense* waterproofing liquid membrane. Pre-formed U-shaped curb covers allow for fast and easy preparation of shower curbs that will receive tile. Utilize *ShowerPerfect* U-Shaped Curb Covers with *Mapelastic AquaDefense* for the areas where shower curbs and shower walls meet in the *ShowerPerfect* shower installation system.


|                         | Product Code | Packaging  |
|-------------------------|--------------|------------|
| <b>U.S./<br/>Canada</b> | 10116        | Box of 150 |



**Reinforcing Fabric**

MAPEI's *Reinforcing Fabric* is a strong, absorbent, polyester reinforcing fabric for use with *Mapelastic™ 400* and *Mapelastic AquaDefense* waterproofing membranes, including as a component in MAPEI's *ShowerPerfect™* shower installation systems.

|                         | Product Code | Packaging  |
|-------------------------|--------------|--|
| <b>U.S./<br/>Canada</b> | 0170004      | Roll: 6" x 75' (15 cm x 22,9 m)<br>Roll: 38" x 75' (0,97 x 22,9 m) |

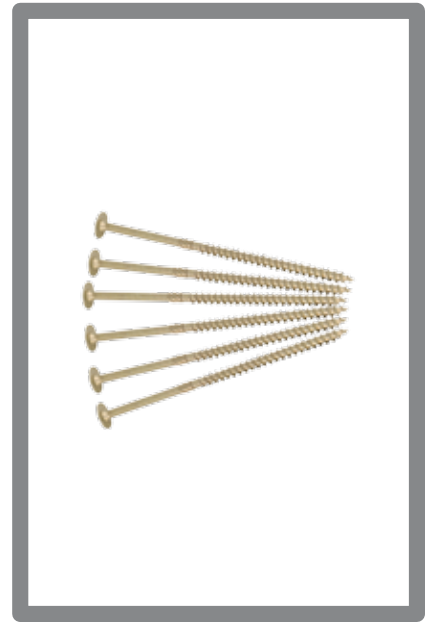

**ShowerPerfect™  
Shower Curb Lag Screws**

**500 Lag Screws for Attaching Pre-Formed Curb**

*ShowerPerfect* Shower Curb Lag Screws are used to position the *ShowerPerfect* Curb tightly against the *ShowerPerfect* Pre-Sloped Panels and *ShowerPerfect* Drain Support Frame after the components are set with MAPEI polymer-modified mortars. *ShowerPerfect* Shower Curb Lag Screws assist in placing the curb and maintaining its position while the mortar is fresh and waterproofing is being applied.

|                         | Product Code | Packaging  |
|-------------------------|--------------|------------|
| <b>U.S./<br/>Canada</b> | 10108        | Box of 500 |



**ShowerPerfect™  
Hybrid Sealant**

**Modified Polyurethane Sealant Adhesive**

*ShowerPerfect* Hybrid Sealant is an elastomeric, one-part, modified polyurethane sealant adhesive used to seal *Mapelastic™ WSM* waterproofing sheet membrane around the *ShowerPerfect* Linear Drain Body perimeter before the *ShowerPerfect* Drain Frame is attached. *ShowerPerfect* Hybrid Sealant is also used for waterproofing the seams of overlapping sheet membrane, and for installing the *ShowerPerfect* SM Inside Corners and *ShowerPerfect* SM U-Shaped Curb Covers.

|                         | Product Code | Packaging                                  |
|-------------------------|--------------|--|
| <b>U.S./<br/>Canada</b> | 10105        | Tube: 10 U.S. oz. (283 g) –<br>12 per case |




**Mapelastic® WSM**

**Polyethylene, Waterproofing Sheet Membrane**

*Mapelastic WSM* is a waterproofing, vaporproofing and crack-isolation sheet membrane consisting of a polyethylene core covered with a nonwoven polypropylene. It is used with *ShowerPerfect* shower installations systems in horizontal as well as vertical tiling applications. *Mapelastic WSM* is designed for waterproofing a 3' x 5' (0,91 x 1,52 m) tub-to-shower conversion, including the shower pan and shower walls, with the roll size of 39" x 30' (99 cm x 9,14 m). It is plumbing-code-approved with PMG products certified by ICC-ES (International Code Council) and Canada's cUPC (Uniform Plumbing Code) products listed by IAPMO.

|                         | Product Code | Packaging                        |
|-------------------------|--------------|----------------------------------|
| <b>U.S./<br/>Canada</b> | 10101        | Roll: 39" x 30' (99 cm x 9,14 m) |

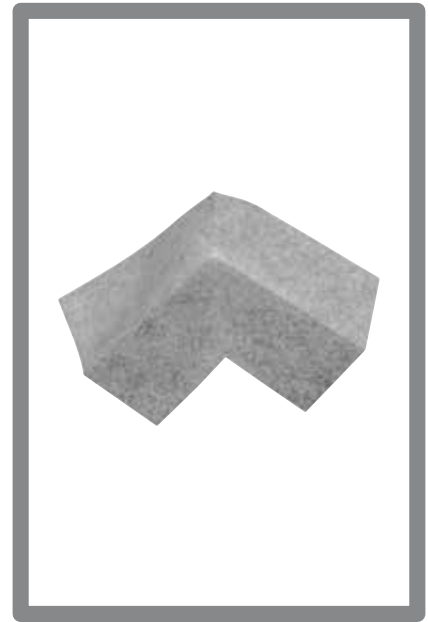

**ShowerPerfect™  
SM Inside Corners**


**Pre-Formed, Seamless Corners**

*ShowerPerfect* SM Inside Corners are waterproofing and vaporproofing membranes consisting of a polyethylene core covered with a nonwoven polypropylene, for use with *Mapelastic™ WSM* waterproofing sheet membrane. Pre-formed inside corners allow for fast and easy preparation of shower corners and wet areas that will receive tile. Utilize *ShowerPerfect* SM Inside Corners with *ShowerPerfect* Hybrid Sealant for the areas where shower curbs, shower walls and pre-sloped panels meet in the *ShowerPerfect* shower installation system.

|                         | Product Code | Packaging  |
|-------------------------|--------------|------------|
| <b>U.S./<br/>Canada</b> | 10114        | Box of 100 |



## ShowerPerfect Linear Drain

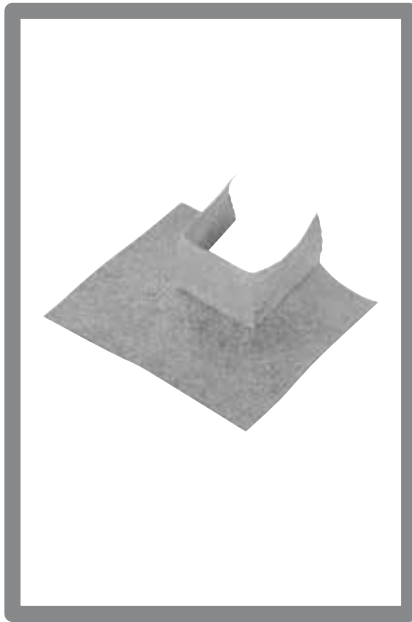

### ShowerPerfect™ SM U-Shaped Curb Covers

#### Pre-Formed, Seamless Corners

*ShowerPerfect* SM U-Shaped Curb Covers are waterproofing and vaporproofing membranes consisting of a polyethylene core covered with a nonwoven polypropylene, for use with *Mapelastic™ WSM* waterproofing sheet membrane. These pre-formed curb covers allow for fast and easy preparation of shower curbs that will receive tile. Utilize *ShowerPerfect* U-Shaped Curb Covers with *ShowerPerfect* Hybrid Sealant for the areas where shower curbs and shower walls meet in the *ShowerPerfect* shower installation system.

|                 | Product Code | Packaging  |
|-----------------|--------------|------------|
| U.S./<br>Canada | 10111        | Box of 150 |



### ShowerPerfect™ Linear Drain Assembly Kit

#### 24" (61 cm) PVC Linear Drain Body, Frame and Extension Components

*ShowerPerfect* Linear Drain Assembly Kit contains the *ShowerPerfect* Linear Drain Body – a durable, patented, PVC linear floor drain that is lightweight, low-profile and specifically designed for use with *Mapelastic™ AquaDefense* or *Mapelastic WSM* waterproofing membrane. *ShowerPerfect* Linear Drain Body is plumbing-code-approved with PMG products certified by ICC-ES (International Code Council) and Canada's cUPC (Uniform Plumbing Code) products listed by IAPMO. Allowing for the use of large-format tile or stone installations with a single plain slope to the drain, *ShowerPerfect* Linear Drain is engineered to be installed 3" to 6" (7,5 to 15 cm) away from the wall and comes with the standard vertical waste line. *ShowerPerfect* Drain Extenders are included to accommodate wall-to-wall shower compartment installations from 26" to 32" (66 to 81 cm) in width. The *ShowerPerfect* Drain Frame is a stainless-steel drain frame clamping collar that ensures a waterproof seal and that features locator pins fabricated into the linear drain body, for ease of alignment after waterproofing.

|                 | Product Code | Packaging     |
|-----------------|--------------|---------------|
| U.S./<br>Canada | 10115        | Small kit box |

## ShowerPerfect Strainer



### ShowerPerfect™ Drain Strainer

#### Stainless-Steel, Height-Adjustable Strainer

The *ShowerPerfect* Drain Strainer is made of high-quality, stainless steel. Packaged with the drain, convenient plastic spacers for adjusting the strainer height provide versatility when various thicknesses of tile or stone are installed. At 32" (81 cm) in length, the strainer comes in three finishes – brushed stainless steel, polished stainless steel and oil-rubbed bronze. A tile-in strainer option is also offered.

|                 | Product Code | Packaging                                      |
|-----------------|--------------|--|
| U.S./<br>Canada | 10107        | Brushed, stainless-steel 32" (81 cm) strainer  |
|                 | 10117        | Polished, stainless-steel 32" (81 cm) strainer |
|                 | 10118        | Oil-rubbed bronze 32" (81 cm) strainer         |
|                 | 10119        | Tile-in drain 32" (81 cm) strainer             |



ANSI A118.10 and ANSI A118.12  
IAPMO File 3996; ASTM C627; ICC Evaluation Service  
Report EST 3474; Los Angeles Board of Building &  
Safety Commissioners File M-130022

**Mapelastico® AquaDefense**

**Premium Waterproofing and Crack-Isolation Membrane**

Mapelastico AquaDefense is a premixed, advanced liquid-rubber, extremely quick-drying waterproofing and crack-isolation membrane for installation under ceramic tile or stone in residential, commercial and industrial environments. Mapelastico AquaDefense provides a thin, continuous barrier to protect adjacent rooms and floors below from water damage. For common problem areas like coves, corners, cracks and drains, it can be combined with MAPEI's optional Reinforcing Fabric or Mapeband™ accessories (cove roll and drain flash) to provide additional protection. Mapelastico AquaDefense dries after about 30 to 50 minutes and is then ready to receive any MAPEI polymer or epoxy mortar. Mapelastico AquaDefense can be flood-tested after 12 hours of drying time, is IAPMO-listed for use as a shower-pan liner, and exceeds ANSI A118.10 and ANSI A118.12 standards.

|               | Product Code | Packaging                   |
|---------------|--------------|-----------------------------|
| <b>U.S./</b>  | 01953        | 1 U.S. gal. (3,79 L)        |
| <b>Canada</b> | 01963        | 3.5 U.S. gals. (13,2 L)     |
|               | 01968        | 5 U.S. gals. (18,9 L)       |
| Special Order | 01977        | Drum: 55 U.S. gals. (208 L) |



ANSI A118.10 and ANSI A118.12  
IAPMO File 3996; ASTM C627

**Mapelastico® 315**

**Professional, Cement-Based Waterproofing Membrane**

Mapelastico 315 is a trowel-applied, flexible, fiber-mesh-reinforced waterproofing and crack-isolation membrane for installation under ceramic tile and stone on indoor/outdoor residential, commercial and industrial intermittent wet and submerged applications. Mapelastico 315 provides an excellent barrier to prevent water from migrating into other areas. Mapelastico 315 is compatible with any polymer-modified cement-based mortar (ANSI A118.4 or better) or epoxy mortar (ANSI A118.3). Mapelastico 315 exceeds ANSI A118.10 requirements for waterproofing and is IAPMO-listed for use as a shower-pan liner.

|               | Product Code | Packaging                   |
|---------------|--------------|-----------------------------|
| <b>U.S./</b>  | 31534000     | Kit: 34 lbs. (15,4 kg)      |
| <b>Canada</b> | 31550000     | Bag: 50 lbs. (22,7 kg)      |
|               | 31557000     | Pail: 2 U.S. gals. (7,57 L) |
| Special Order | 31577000     | Drum: 55 U.S. gals. (208 L) |
| <b>Canada</b> | 3153400021   | Bag: 34 lbs. (15,4 kg)      |



ANSI A118.10  
IAPMO File 3996; ASTM C627

**Mapelastico® HPG**

**Flexible Waterproofing and Crack-Isolation Membrane**

Mapelastico HPG is a ready-to-use, highly flexible, liquid acrylic waterproofing membrane for installation under ceramic tile or stone on residential and light commercial interior floors and walls. Applied with a roller, trowel or brush, Mapelastico HPG has excellent compatibility with cement-based mortars. When installed with MAPEI's Fiberglass Mesh, Mapelastico HPG can also be used as a crack-isolation membrane and will meet ANSI A118.10 standards for waterproofing. In addition, Mapelastico HPG is IAPMO-listed for use as a shower-pan liner.

|               | Product Code | Packaging                    |
|---------------|--------------|------------------------------|
| <b>U.S.</b>   | 35563000     | Pail: 3.5 U.S. gals (13,2 L) |
|               | 35553000     | Bucket: 1 U.S. gal. (3,79 L) |
|               | 35568000     | Pail: 5 U.S. gals. (18,9 L)  |
| <b>Canada</b> | 35553000     | Bucket: 1 U.S. gal. (3,79 L) |
|               | 35568000     | Pail: 5 U.S. gals. (18,9 L)  |





Fiberglass Mesh

### Fiberglass Mesh

#### For Mapelastic, Mapelastic 315, Mapelastic HPG and Mapelastic Smart Waterproofing Products

MAPEI's *Fiberglass Mesh* is a ready-to-use, thin, strong yet flexible alkali-resistant mesh for embedment with waterproofing and crack-isolation membranes – including MAPEI's *Mapelastic™*, *Mapelastic 315*, *Mapelastic HPG* and *Mapelastic Smart* – on residential and commercial floors, walls and ceilings.

*Fiberglass Mesh* reinforces and improves the performance of MAPEI's waterproofing membranes when applied over cracks, coves and corners and around drains on residential and commercial applications. *Fiberglass Mesh* can be cut to size with scissors or a razor knife, and has excellent compatibility with all MAPEI cement- or epoxy-based mortars.

|               | Product Code | Packaging                         |
|---------------|--------------|-----------------------------------|
| <b>U.S./</b>  | 03101000     | Roll: 39" x 75' (0.99 m x 22.9 m) |
| <b>Canada</b> | 8040002      | Roll: 39.4" x 328' (1 m x 100 m)  |
|               | 8040003      | Roll: 12" x 150' (0.3 m x 45.7 m) |



### Mapeband™

#### Rubber-Coated Waterproofing Accessories

*Mapeband* cove roll and drain flashing are flexible, rubber-coated polyester accessories for waterproofing. They are designed for fast, easy embedment with MAPEI's *Mapelastic™*, *Mapelastic 315*, *Mapelastic HPG* and *Mapelastic Smart* waterproofing membranes over coves, corners, drains, expansion and movement joints.

|               | Product Code | Packaging  |
|---------------|--------------|--|
| <b>U.S./</b>  | 02101000     | Drain Flashing: 16.75" x 16.75" (42.5 x 42.5 cm) |
| <b>Canada</b> | 02401000     | Cove Roll: 4.75" x 163' (12 cm x 49.7 m)         |

### Reinforcing Fabric

MAPEI's *Reinforcing Fabric* is a strong, absorbent, polyester reinforcing fabric for use with *Mapelastic™* 400 and *Mapelastic AquaDefense* waterproofing membranes, including as a component in MAPEI's *ShowerPerfect™* shower installation systems.

|               | Product Code | Packaging                         |
|---------------|--------------|-----------------------------------|
| <b>U.S./</b>  | 0170004      | Roll: 6" x 75' (15 cm x 22.9 m)   |
| <b>Canada</b> | 0170007      | Roll: 38" x 75' (0.97 m x 22.9 m) |



ANSI A118.10; IAPMO File 3996

### Mapelastic® Smart

#### Roller-Grade, Flexible Cementitious Membrane for Concrete Waterproofing and Protection

*Mapelastic Smart* is a cementitious membrane for protecting new concrete structures, concrete structures repaired with *Mapecem®* or *Planitop®* mortars, renders with hairline cracks, and any cementitious surface subject to vibrations and the subsequent cracking. *Mapelastic Smart* also is designed as an intermediate waterproofing membrane on such hydraulic projects as channels and faces of dams as well as swimming pools, basins, storage tanks, balconies and terraces.

|               | Product Code | Packaging                          |
|---------------|--------------|------------------------------------|
| <b>U.S./</b>  | 39750000     | Part A, Bag: 33.3 lbs. (15.1 kg)   |
| <b>Canada</b> | 39757000     | Part B, Jug: 2 U.S. gals. (7.57 L) |







ANSI A118.12 and A118.13;  
ASTM C627 and E492-04

### Mapeguard® 2

#### Premium Crack-Isolation and Sound-Reduction Sheet Membrane

*Mapeguard 2* is a next-generation, flexible, thin, 40-mil, lightweight, load-bearing, fabric-reinforced “peel-and-stick” crack-isolation membrane. After application, ceramic tile or stone can be installed immediately with any polymer-modified cement-based mortar. Glue-down wood flooring can also be installed with any MAPEI urethane adhesive.

*Mapeguard 2* helps to prevent existing or future in-plane floor cracks (with movement up to 3/8" [10 mm] wide) from transmitting through grout, ceramic tile or natural stone. It also reduces the transmission of impact sound (footsteps, dropped objects, etc.) and airborne sound (voice, TV, etc.) through floors when installed under ceramic tile, stone or wood-floor coverings.

|                         | Product Code | Packaging  |
|-------------------------|--------------|--|
| <b>U.S./<br/>Canada</b> | 04051        | Boxed Roll: 39.4" x 68.6"<br>(1 x 20,9 m)<br>for 225 sq. ft. (20,9 m <sup>2</sup> ) per roll |



ANSI A118.12 and A118.13;  
ASTM C627 and E492-04

### Mapesound™ 90

#### Professional, Sound-Reduction and Crack-Isolation Sheet Membrane

*Mapesound 90* is a flexible, thin, 90-mil lightweight load-bearing, fabric-reinforced, “peel-and-stick” sound-reduction and crack-isolation sheet membrane. After application, ceramic tile or stone can be installed immediately with recommended MAPEI polymer-modified cement-based mortar, or glue-down wood flooring can be immediately installed with any MAPEI urethane or hybrid-polymer-based wood adhesive.

*Mapesound 90* reduces transmission of impact sound (footsteps, dropped objects, etc.) and airborne sound (voice, TV, etc.) through floors when installed under ceramic tile, stone or wood floor coverings. It also helps to prevent existing or future in-plane floor cracks (with movement up to 3/8" [10 mm] wide) from transmitting through grout, ceramic tile or natural-stone assemblies.

|                         | Product Code | Packaging  |
|-------------------------|--------------|--|
| <b>U.S./<br/>Canada</b> | 04136        | Boxed Roll: 39.4" x 35"<br>(1 x 10,7 m)<br>for 115 sq. ft. (10,7 m <sup>2</sup> ) per roll |



ANSI A118.12 and A118.13;  
ASTM C627 and E492-04

### Mapesonic™ 2

#### Premium Sound-Reduction and Crack-Isolation Sheet Membrane

*Mapesonic 2* is a patent-pending, next-generation, flexible, 76-mil thin, lightweight, load-bearing, fabric-reinforced “peel-and-stick” sound-reduction and crack-isolation membrane. Application of *Mapesonic 2* can be immediately followed by installation of flooring: ceramic tile or stone with a recommended MAPEI polymer-modified, cement-based mortar; luxury vinyl tile or luxury vinyl plank with an appropriate MAPEI flooring adhesive; or glue-down wood flooring with any MAPEI urethane or hybrid-polymer-based wood adhesive.

*Mapesonic 2* reduces transmission of impact sound (such as footsteps and dropped objects) and airborne sound (such as voice and TV) through floors when installed under ceramic tile, stone, vinyl and wood floor coverings. It also helps to prevent existing or future in-plane floor cracks (with movement up to 3/8" [10 mm] wide) from transmitting through grout, ceramic tile and natural-stone assemblies.

|                         | Product Code | Packaging  |
|-------------------------|--------------|--|
| <b>U.S./<br/>Canada</b> | 04140000     | Boxed Roll: 39" x 49.2"<br>(99 cm x 15 m)<br>for 160 sq. ft. (14,9 m <sup>2</sup> ) per roll |







ANSI A118.12; ASTM C627

### MAPEI SM Primer™

#### Water-Based Primer for MAPEI Peel-and-Stick Membranes

MAPEI SM Primer is a ready-to-use, fast-drying, water-based, latex primer for use under MAPEI's peel-and-stick sheet membranes on residential and commercial indoor or outdoor floors. MAPEI SM Primer greatly increases the bond of MAPEI's peel-and-stick sheet membranes to concrete, plywood and other approved, properly prepared floors. It can be applied with a roller or brush, is white in color and dries clear.

### MAPEI SM Primer™ Fast

#### Fast-Tacking, Water-Based Primer for MAPEI Peel-and-Stick Membranes

MAPEI SM Primer Fast is a ready-to-use, fast-drying, quick-tacking, water-based, pressure-sensitive, nonhydrolyzable latex primer for use under MAPEI's peel-and-stick sheet membranes on residential and commercial indoor or outdoor floors. MAPEI SM Primer Fast greatly increases the bond of MAPEI's peel-and-stick sheet membranes to concrete, plywood and other approved, properly prepared floors. It can be applied with a roller or brush, is white in color and dries clear.

### Mapelastick® CI

#### Professional Crack-Isolation Membrane

Mapelastick CI is a premixed, liquid-rubber, quick-drying crack-isolation membrane for installation under ceramic tile or stone in residential and commercial interior and exterior environments. Mapelastick CI meets ANSI A118.12 requirements, provides up to 1/8" (3 mm) of in-plane crack isolation and dries after about 30 to 50 minutes. It is then ready to receive most MAPEI polymer-modified or epoxy mortars.

|               | Product Code | Packaging                   |
|---------------|--------------|-----------------------------|
| <b>U.S./</b>  | 7071001      | Jug: 1 U.S. gal. (3,79 L)   |
| <b>Canada</b> | 7071005      | Pail: 5 U.S. gals. (18,9 L) |

|             | Product Code | Packaging                                    |
|-------------|--------------|--|
| <b>U.S.</b> | 33354        | Jug: 1 U.S. gal. (3,79 L)<br>4 jugs per case |

|               | Product Code | Packaging                     |
|---------------|--------------|-------------------------------|
| <b>U.S./</b>  | 32110        | Pail: 1 U.S. gal. (3,79 L)    |
| <b>Canada</b> | 32163        | Pail: 3.5 U.S. gals. (13,2 L) |





ANSI A118.4F, A118.11 and A118.15F

### Granirapid® System

#### Premium, Rapid-Setting, Flexible Tile Mortar

Granirapid is the next generation of high-performance, flexible mortar systems. As the industry's first and only fast-curing system geared for fast-track projects, it develops high, early mechanical strength and can be specified for the same demanding applications as Keralastic™. However, Granirapid will cure considerably faster because of its superior drying-out characteristics, which produce low residual moisture behind the tile after 24 hours, and does not contribute to efflorescence. When installed in conjunction with Ultracolor® Plus grout, Granirapid will allow water submersion in a revolutionary 72 hours.

ISO 13007 C2FS2P2

| Product Code          | Color | Packaging                   |
|-----------------------|-------|-----------------------------|
| <b>U.S./</b> 7052057  | N/A   | Jug: 2 U.S. gals. (7.57 L)  |
| <b>Canada</b> 7052056 | N/A   | Pail: 5 U.S. gals. (18.9 L) |
| 7052055               | N/A   | Drum: 55 U.S. gals. (208 L) |
| 7051040               | Gray  | Bag: 50 lbs. (22.7 kg)      |
| 7051041               | White | Bag: 46 lbs. (20.9 kg)      |



ANSI A118.4E, A118.11 and A118.15E

### Kerabond/Keralastic™ System

#### Premium, Flexible Tile Mortar

Kerabond/Keralastic System is a high-performance, two-part system: Keralastic™, a second-generation "flexible" acrylic latex additive, is used to enhance the performance of Kerabond™, which is a premium-grade dry-set mortar. This system has exceptional bond strength, flexural strength, elongation and freeze/thaw durability. To ensure proper flexibility, always use a latex additive when applying a dry-set mortar over plywood or to set nonvitreous tiles.

ISO 13007 C2ES2P2

| Product Code            | Color | Packaging                   |
|-------------------------|-------|-----------------------------|
| <b>U.S.</b> 0020050     | Gray  | Bag: 50 lbs. (22.7 kg)      |
| 0010050                 | White | Bag: 50 lbs. (22.7 kg)      |
| 7022007                 | N/A   | Jug: 2 U.S. gals. (7.57 L)  |
| 7020020                 | N/A   | Pail: 5 U.S. gals. (18.9 L) |
| 7020200                 | N/A   | Drum: 55 U.S. gals. (208 L) |
| <b>Canada</b> 002005021 | Gray  | Bag: 50 lbs. (22.7 kg)      |
| 001005021               | White | Bag: 50 lbs. (22.7 kg)      |
| 7022007                 | N/A   | Jug: 2 U.S. gals. (7.57 L)  |
| 7020020                 | N/A   | Pail: 5 U.S. gals. (18.9 L) |
| 7020200                 | N/A   | Drum: 55 U.S. gals. (208 L) |



ANSI A118.4E, A118.11 and A118.15E

### Kerabond® T / Keralastic™ System

#### Premium, Flexible Medium-Bed and Thin-Set Tile Mortar

Kerabond T / Keralastic System is a high-performance, two-part system: Keralastic™, a second-generation "flexible" acrylic latex additive, is used to enhance the performance of Kerabond T™, which is a premium-grade, medium-bed and thin-set mortar. This system has exceptional bond strength, flexural strength, elongation and freeze/thaw durability.

ISO 13007 C2ES2P2

| Product Code          | Color | Packaging                   |
|-----------------------|-------|-----------------------------|
| <b>U.S.</b> 10152     | Gray  | Bag: 50 lbs. (22.7 kg)      |
| 10252                 | White | Bag: 50 lbs. (22.7 kg)      |
| 7022007               | NA    | Jug: 2 U.S. gals. (7.57 L)  |
| 7020020               | NA    | Pail: 5 U.S. gals. (18.9 L) |
| 7020200               | NA    | Drum: 55 U.S. gals. (208 L) |
| <b>Canada</b> 1015221 | Gray  | Bag: 50 lbs. (22.7 kg)      |
| 1025221               | White | Bag: 50 lbs. (22.7 kg)      |
| 7022007               | NA    | Jug: 2 U.S. gals. (7.57 L)  |
| 7020020               | NA    | Pail: 5 U.S. gals. (18.9 L) |
| 7020200               | NA    | Drum: 55 U.S. gals. (208 L) |





ANSI A118.4E, A118.11 and A118.15E



ANSI A118.4TF and A118.11



ANSI A118.4TE and A118.11

### Ultraflex™ 3

#### Premium Tile Mortar with Polymer

Ultraflex 3 is a premium-grade, single-component, high-performance, polymer-modified thin-set mortar for interior and exterior installations of tile. This mortar has a high content of a unique dry polymer, resulting in superior adhesion to the substrate and tile. In addition, it can be used for most interior/exterior residential and commercial tile applications on floors and walls. Ultraflex 3 meets or exceeds ANSI A118.4E, ANSI A118.11 and ANSI A118.15E when mixed with water.

### Ultraflex™ LFT™ Rapid

#### Premium, Rapid-Setting, Large-Format Tile Mortar with Polymer

Ultraflex LFT Rapid is a premium, rapid-setting, nonsag medium-bed and thin-set mortar for large-format tile and stone for interior/exterior floor, wall and countertop installations. This mortar has a high content of unique dry polymer, resulting in excellent adhesion to the substrate and tile. Ultraflex LFT Rapid is FastTrack Ready™, allowing grouting in 3 to 4 hours.

### Ultraflex™ LFT™

#### Premium, Large-Format Tile Mortar with Polymer

Ultraflex LFT is a premium, nonsag medium-bed and thin-set mortar designed for large-format and heavy tile and stone for interior/exterior floor, wall and countertop installations. This mortar has a high content of unique dry polymer, resulting in excellent adhesion to the substrate and tile. It is formulated with Easy Glide Technology™ for ease of application.

ISO 13007 C2ES1P1

| Product Code            | Color | Packaging              |
|-------------------------|-------|------------------------|
| <b>U.S.</b> 0060058     | Gray  | Bag: 50 lbs. (22,7 kg) |
| 0060059                 | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> 006005821 | Gray  | Bag: 50 lbs. (22,7 kg) |

ISO 13007 C2TFS1P1

| Product Code       | Color | Packaging              |
|--------------------|-------|------------------------|
| <b>U.S./</b> 14250 | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b>      |       |                        |

ISO 13007 C2TES1P1

| Product Code             | Color | Packaging              |
|--------------------------|-------|------------------------|
| <b>U.S.</b> 11250000     | Gray  | Bag: 50 lbs. (22,7 kg) |
| 11350000                 | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> 1125000021 | Gray  | Bag: 50 lbs. (22,7 kg) |
| 11350000                 | White | Bag: 50 lbs. (22,7 kg) |







ANSI A118.4F, A118.11 and A118.15F



ANSI A118.4E and A118.11



ANSI A118.4TE and ANSI A118.11

**NEW!**

**Ultraflex™ RS**

**Premium, Rapid-Setting Tile Mortar with Polymer**

Ultraflex RS is a premium-grade, single-component, high-performance, polymer-modified, rapid-setting thin-set mortar for interior and exterior installations of tile. This mortar has a high content of unique dry polymer, resulting in excellent adhesion to the substrate and tile. Ultraflex RS is a FastTrack Ready™ product, allowing grouting in 2 to 3 hours. It can be used for both interior and exterior installations of tile in most residential floor and wall applications. In commercial applications, use on interior floor and wall installations and exterior floors. Ultraflex RS meets or exceeds ANSI A118.4F, ANSI A118.11 and ANSI A118.15F requirements for fast-setting mortars when mixed with water.

**Ker® 121**

**Professional, One-Step Tile Mortar with Polymer**

Ker 121 is a professional-grade, single-component, high-performance mortar for the installation of ceramic, marble, granite and porcelain stoneware tile over most traditional and specialty substrates. Ker 121 can be used for most interior residential floor and wall tile applications. In commercial applications, use on interior floor and wall installations as well as exterior floors.



**Ultraflex™ LHT™**

**Large-and-Heavy-Tile Mortar with Polymer**

Ultraflex LHT is a nonsag medium-bed and thin-set mortar for large-format and heavy tile and stone for interior/exterior installations on floors, walls and countertops. This polymer-modified mortar is formulated with Easy Glide Technology™ for ease of application with excellent adhesion to the substrate and tile.

ISO 13007 C2FS1P1   

|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S./</b>  | 0110044      | Gray  | Bag: 25 lbs. (11,3 kg) |
| <b>Canada</b> | 0110045      | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 0110047      | White | Bag: 50 lbs. (22,7 kg) |

ISO 13007 C2EP1  

|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>Canada</b> | 1215000021   | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 1212500021   | Gray  | Bag: 25 lbs. (11,3 kg) |
|               | 1211000021   | Gray  | Bag: 10 lbs. (4,54 kg) |

ISO 13007 C2TE 

|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 9021831      | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 9021830      | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> | 2183123      | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 2183023      | White | Bag: 50 lbs. (22,7 kg) |







ANSI A118.4E and A118.11



ANSI A118.4E and A118.11



ANSI A118.4

## Ultraflex™ 2

### Professional Tile Mortar with Polymer

*Ultraflex 2* is a professional-grade, single-component, high-performance, polymer-modified thin-set mortar for interior and exterior installations of ceramic, porcelain and dimensional natural-stone tile. This mortar has a high content of a unique dry polymer, resulting in excellent adhesion to the substrate and tile. *Ultraflex 2* meets or exceeds ANSI A118.4E and ANSI A118.11 requirements when mixed with water. *Ultraflex 2* can be used for interior and exterior installations of tile in most residential floor and wall applications. In commercial applications, use on interior floor and wall installations and exterior floors.

## Ultraflex™ 1

### Standard Tile Mortar with Polymer

*Ultraflex 1* is a standard-grade, single-component, polymer-modified thin-set mortar for most interior and exterior installations of tile. This mortar has an above-average content of a unique dry polymer, resulting in good adhesion to the substrate and tile. *Ultraflex 1* can be used for both interior and exterior installations of tile in most residential floor and wall applications. In commercial applications, use on interior floor and wall installations and exterior floors. *Ultraflex 1* meets or exceeds ANSI A118.4E and ANSI A118.11 requirements when mixed with water.

## Ker® 111

### Basic Tile Mortar with Polymer

*Ker 111* is a single-component, thin-set mortar for interior and exterior installations of dimensional stone, ceramic, porcelain and quarry tile. This mortar is formulated with a unique dry polymer, resulting in good adhesion to substrates and tile.

ISO 13007 C2EP1



|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 0060054      | Gray  | Bag: 25 lbs. (11.3 kg) |
|               | 0060055      | Gray  | Bag: 50 lbs. (22.7 kg) |
|               | 0060056      | White | Bag: 25 lbs. (11.3 kg) |
|               | 0060057      | White | Bag: 50 lbs. (22.7 kg) |
| <b>Canada</b> | 006005321    | Gray  | Bag: 10 lbs. (4.54 kg) |
|               | 006005421    | Gray  | Bag: 25 lbs. (11.3 kg) |
|               | 0060055      | Gray  | Bag: 50 lbs. (22.7 kg) |
|               | 0060057      | White | Bag: 50 lbs. (22.7 kg) |

ISO 13007 C2E



|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 0060048      | Gray  | Bag: 50 lbs. (22.7 kg) |
|               | 0060049      | White | Bag: 50 lbs. (22.7 kg) |
| <b>Canada</b> | 006004821    | Gray  | Bag: 50 lbs. (22.7 kg) |
|               | 006004921    | White | Bag: 50 lbs. (22.7 kg) |

ISO 13007 C2



|                         | Product Code | Color | Packaging              |
|-------------------------|--------------|-------|------------------------|
| <b>U.S./<br/>Canada</b> | 0060046      | Gray  | Bag: 50 lbs. (22.7 kg) |
|                         | 0060045      | White | Bag: 50 lbs. (22.7 kg) |





ANSI A118.4TE and A118.11 when mixed with Keraply™

### Adesilex™ P10 Mosaic & Glass Tile

#### Premium Glass Tile Mortar with Polymer

Adesilex P10 is a premium-grade, bright white, multipurpose thin-set mortar formulated with nonsag properties. Adesilex P10 is designed for glass tile, glass mosaic and marble mosaic, and is ideal for light translucent natural stone.



ANSI A118.4 when mixed with water and ANSI A118.11 when mixed with Keraply™

### Ultraflor™ Plus

#### Large-and-Heavy-Floor-Tile Mortar with Polymer

Ultraflor Plus is a polymer-modified, large-and-heavy-floor-tile mortar (formerly “medium-bed mortar”) and thin-set mortar for interior/exterior floor applications of large-format and heavy tile/stone. It is used to install porcelain tile, heavy-ribbed-back tile, brick pavers, dimensional tile and natural-stone tile. Ultraflor Plus is designed for use at 3/32” to 1/2” (2,5 to 12 mm) thickness to minimize back-buttering and give better support under large-format tile.



ANSI A118.4 and ANSI A118.11 when mixed with Keraply™

### Ultraflor™

#### Medium-Bed Mortar

Ultraflor is a medium-bed, polymer-modified mortar for interior and exterior setting of large-format tile, including heavy-ribbed-back tile, brick pavers, dimensional tile and natural-stone tile. Ultraflor is designed for use at 3/8” to 3/4” (10 to 19 mm) thickness to give better support under large-format tile.

When mixed with water: ISO 13007 C2TE

When mixed with Keraply: ISO 13007 C2TES1P1

|        | Product Code | Color        | Packaging              |
|--------|--------------|--------------|------------------------|
| U.S./  | 15411        | Bright White | Bag: 10 lbs. (4,54 kg) |
| Canada | 11343000     | Bright White | Bag: 43 lbs. (19,5 kg) |

When mixed with water: ISO 13007 C2

When mixed with Keraply: ISO 13007 C2S1

|        | Product Code | Color | Packaging              |
|--------|--------------|-------|------------------------|
| U.S./  | 2183623      | Gray  | Bag: 50 lbs. (22,7 kg) |
| Canada | 2183523      | White | Bag: 50 lbs. (22,7 kg) |

When mixed with water: ISO 13007 C2

When mixed with Keraply: ISO 13007 C2S1

|      | Product Code | Color | Packaging              |
|------|--------------|-------|------------------------|
| U.S. | 0030050      | Gray  | Bag: 50 lbs. (22,7 kg) |
|      | 0030051      | White | Bag: 50 lbs. (22,7 kg) |





ANSI A118.4F and A118.11



ANSI A118.4E and A118.11



ANSI A118.4E and A118.11

Polymer-Modified Mortars

Full-Contact Mortars

Lightweight Polymer-Modified Mortars

**Ultracontact™ RS**

**Premium, Rapid-Setting, Full-Contact Tile Mortar with Polymer**

*Ultracontact RS* is a premium, rapid-setting, polymer-modified, high-performance, full-contact mortar. Its superior wet-out characteristics achieve outstanding transfer to the back of the tile and eliminate the need for back-buttering. It is more fluid than traditional mortars, yet holds its ridges regardless of trowel size. It can be used in thin-set and medium-bed applications with all types of tile sizes. *Ultracontact RS* is FastTrack Ready™, allowing for grouting in 3 to 4 hours.

**Ultracontact™**



**Premium, Full-Contact Tile Mortar with Polymer**

*Ultracontact* is a premium, polymer-modified, high-performance full-contact mortar. Its superior wet-out characteristics achieve outstanding transfer to the back of the trowel and eliminate the need for back-buttering. *Ultracontact* is more fluid than traditional mortars, yet holds its ridges regardless of trowel size. It can be used in thin-set and medium-bed applications with all types of tile sizes.



**MAPEI Ultralite™ S2**

**Premium, Highly Deformable, Lightweight Thin-Tile Mortar with Polymer**




*MAPEI Ultralite S2* is a premium-grade, lightweight, single-component thin-set mortar that is ideal for thin-tile applications. This high-performance, highly deformable, polymer-modified mortar is formulated with Easy Glide Technology™ for ease of application. *MAPEI Ultralite S2* features a long open time, extended coverage and superior transfer properties to enhance back-buttering, which is ideal for thin porcelain tiles as well as ceramic tiles and stone material. *MAPEI Ultralite S2*'s unique Ultralite Technology™ provides twice the coverage of a standard thin-set mortar per pound/kg and may contribute to LEED points with 20% recycled content.

ISO 13007 C2FP1  

|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 2030050      | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 2030051      | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> | 203005021    | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 203005121    | White | Bag: 50 lbs. (22,7 kg) |

ISO 13007 C2EP1  

|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 2031050      | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 2031051      | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> | 203105021    | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 203105121    | White | Bag: 50 lbs. (22,7 kg) |

ISO 13007 C2ES2P2   

|                    | Product Code | Color | Packaging              |
|--------------------|--------------|-------|------------------------|
| <b>U.S./Canada</b> | 1201511      | Gray  | Bag: 25 lbs. (11,3 kg) |
|                    | 1201611      | White | Bag: 25 lbs. (11,3 kg) |
| <b>Canada</b>      | 1201511C     | Gray  | Bag: 25 lbs. (11,3 kg) |
|                    | 1201611C     | White | Bag: 25 lbs. (11,3 kg) |







ANSI A118.4TF and ANSI A118.11

**NEW!**

### MAPEI Ultralite™ S1 Quick

#### Premium, Rapid-Setting, Lightweight Tile Mortar with Polymer

MAPEI Ultralite S1 Quick is a premium-grade, rapid-setting, lightweight, single-component thin-set mortar that can also be used as a large-and-heavy-tile mortar (formerly known as “medium-bed mortar”) for nonsag applications of large-and-heavy-format tile and stone.

MAPEI Ultralite S1 Quick is a FastTrack Ready™ product, allowing grouting in 3 to 4 hours. This high-performance, polymer-modified mortar is formulated with Easy Glide Technology™ for ease of application. And thanks to its Ultralite Technology™, MAPEI Ultralite S1 Quick provides twice the coverage of a standard thin-set mortar per pound/kg.

| ISO 13007 C2TFS1P1 |              |       |                        |
|--------------------|--------------|-------|------------------------|
|                    | Product Code | Color | Packaging              |
| <b>U.S./</b>       | 2428011      | Gray  | Bag: 25 lbs. (11,3 kg) |
| <b>Canada</b>      | 2428611      | White | Bag: 25 lbs. (11,3 kg) |



ANSI A118.4TE and A118.11

### MAPEI Ultralite™ Mortar

#### Premium, Lightweight Tile Mortar with Polymer

MAPEI Ultralite Mortar is a premium-grade, lightweight, single-component thin-set mortar that can also be used for medium-bed and nonsag applications. This high-performance, polymer-modified mortar is formulated with Easy Glide Technology™ for ease of application, and with BioBlock® technology for mold and mildew resistance. MAPEI Ultralite Mortar's unique Ultralite Technology™ provides twice the coverage of a standard thin-set mortar per pound/kg and may contribute to LEED points with more than 20% recycled content.

| ISO 13007 C2TES1P1 |              |                        |
|--------------------|--------------|------------------------|
|                    | Product Code | Packaging              |
| <b>U.S.</b>        | 14625000     | Bag: 25 lbs. (11,3 kg) |
| <b>Canada</b>      | 1462500021   | Bag: 25 lbs. (11,3 kg) |



ANSI A118.4TE and A118.11

### MAPEI Ultralite™ Mortar Pro

#### Professional, Lightweight Tile Mortar with Polymer

MAPEI Ultralite Mortar Pro is a professional-grade, lightweight, single-component thin-set mortar that can also be used for medium-bed and nonsag applications. This polymer-modified mortar is formulated with Easy Glide Technology™ for ease of application. MAPEI Ultralite Mortar Pro's unique Ultralite Technology™ provides twice the coverage of a standard thin-set mortar per pound/kg and may contribute to LEED points with more than 20% recycled content.

| ISO 13007 C1TES1 |              |                               |
|------------------|--------------|-------------------------------|
|                  | Product Code | Packaging                     |
| <b>U.S.</b>      | 15625        | Bag: 25 lbs. (11,3 kg), gray  |
|                  | 16625        | Bag: 25 lbs. (11,3 kg), white |
| <b>Canada</b>    | 1562521      | Bag: 25 lbs. (11,3 kg), gray  |
|                  | 1662521      | Bag: 25 lbs. (11,3 kg), white |







ANSI A118.3



### Kerapoxy® 410

#### Premium, 100%-Solids Epoxy Setting Mortar

*Kerapoxy 410* is a solvent-free, 100%-solids epoxy setting floor and wall mortar that is suited for areas where most chemical-resistant setting material is necessary. It also has high compressive strength, which provides excellent impact strength in commercial facilities. *Kerapoxy 410* is designed for setting most types of tile and stone.

### Planicrete® W


#### Flexible Setting Compound

*Planicrete W* is tremendously flexible and excellent for installing tile over well-supported and properly prepared steel substrates (such as ship decks, elevators, steel staircases and bank vaults). It is designed for setting most types of tile, including moisture-sensitive tile, natural stone and their agglomerates.


### Glass-Block Mortar

#### Pre-Blended Mortar for Glass-Block Installations

*Glass-Block Mortar* is a factory-prepared blend of Portland cement, sand and chemicals specifically designed for glass-block installation. This white mortar can be used for both setting of the blocks and tooling of the block joints.

ISO 13007 R2 

|               | Product Code | Packaging                  |
|---------------|--------------|----------------------------|
| <b>U.S.</b>   | 3961001      | Kit: 3 U.S. gals. (11,4 L) |
| <b>Canada</b> | 396100121    | Kit: 3 U.S. gals. (11,4 L) |

ISO 13007 R2 

|                    | Product Code | Packaging                    |
|--------------------|--------------|------------------------------|
| <b>U.S./Canada</b> | 3430007      | Kit: 1.8 U.S. gals. (6,81 L) |

|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 0140050      | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> | 014005021    | White | Bag: 50 lbs. (22,7 kg) |





ANSI A118.1



ANSI A118.1T



ANSI A118.1

### Kerabond®

#### Premium Tile Mortar

*Kerabond* is a premium-grade, dry-set mortar for use in interior/exterior residential and commercial floor and wall applications when mixed with water.

### Kerabond® T

#### Premium Medium-Bed and Thin-Set Tile Mortar

*Kerabond T* is a premium-grade, nonsag, nonslump mortar for use in thin-set and medium-bed applications in interior/exterior residential and commercial floors and walls when mixed with water.

### Keraset®

#### Professional Tile Mortar

*Keraset* is a dry-set mortar for use in interior/exterior residential and light commercial floor and wall applications.

ISO 13007 C1



|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 0020050      | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 0010050      | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> | 002005021    | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 001005021    | White | Bag: 50 lbs. (22,7 kg) |

ISO 13007 C1T



|               | Product Code | Color | Packaging              |
|---------------|--------------|-------|------------------------|
| <b>U.S.</b>   | 10152        | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 10252        | White | Bag: 50 lbs. (22,7 kg) |
| <b>Canada</b> | 1015221      | Gray  | Bag: 50 lbs. (22,7 kg) |
|               | 1025221      | White | Bag: 50 lbs. (22,7 kg) |

ISO 13007 C1



|             | Product Code | Color | Packaging              |
|-------------|--------------|-------|------------------------|
| <b>U.S.</b> | 0050050      | Gray  | Bag: 50 lbs. (22,7 kg) |
|             | 0050051      | White | Bag: 50 lbs. (22,7 kg) |





ANSI A118.1

### Keraflor®

#### Standard Tile Mortar

*Keraflor* is a dry-set mortar for use in interior/ exterior residential and light commercial floor applications.



### Keralastic®

#### Premium Latex Additive for Kerabond®

*Keralastic* is a premium-grade, high-performance, second-generation “flexible” acrylic latex additive used in the *Kerabond/Keralastic™* and *Kerabond T / Keralastic* systems. This highly recommended additive enhances bond strength, flexural strength, elongation and freeze/thaw durability. To ensure proper flexibility, always use a latex additive when using a dry-set mortar for applications over plywood and for setting nonvitreous, semivitreous, vitreous and impervious tiles.

See the Technical Data Sheet of the appropriate system for the complete attributes of the setting system.



### Keraply®

#### Professional Latex Additive for Tile Mortar

*Keraply* is a professional-grade, acrylic latex admixture used to enhance the performance of MAPEI's non-modified, dry-set mortars as well as *Adesilex™ P10* glass tile mortar. As a highly recommended admixture, *Keraply* enhances bond strength, flexural strength, elongation and freeze/thaw durability.

ISO 113007 C1



|        | Product Code | Color | Packaging              |
|--------|--------------|-------|------------------------|
| U.S.   | 0040050      | Gray  | Bag: 50 lbs. (22,7 kg) |
|        | 0040051      | White | Bag: 50 lbs. (22,7 kg) |
| Canada | 0040050      | Gray  | Bag: 50 lbs. (22,7 kg) |

|        | Product Code | Packaging                                      |
|--------|--------------|--|
| U.S.   | 7022007      | Jug: 2 U.S. gals. (7,57 L)                     |
|        | 7020020      | Pail: 5 U.S. gals. (18,9 L)                    |
|        | 7020200      | Drum: 55 U.S. gals. (208 L)                    |
| Canada | 7022007      | Jug: 2 U.S. gals. (7,57 L)                     |
|        | 7020020      | Pail: 5 U.S. gals. (18,9 L)                    |
|        | 7020200      | Drum: 55 U.S. gals. (208 L)                    |
|        | 7020034      | Kit (with <i>Kerabond</i> ): 34 lbs. (15,4 kg) |

|                 | Product Code | Packaging                   |
|-----------------|--------------|-----------------------------|
| U.S./<br>Canada | 7033010      | Jug: 2 U.S. gals. (7,57 L)  |
|                 | 7030020      | Pail: 5 U.S. gals. (18,9 L) |
|                 | 7030200      | Drum: 55 U.S. gals. (208 L) |





ANSI A136.1, Type 1

ANSI A136.1, Type 1

**Keracrete®**

**Latex Additive for Site-Prepared Thin-Set**

*Keracrete* is a specially formulated latex additive for jobsite-prepared setting beds (1 part sand to 1 part cement), resulting in a highly water- and frost-resistant mortar.

**Ultramastic ECO™**

**High-Performance Floor and Wall Tile Adhesive**

*Ultramastic ECO* is a premium, solvent-free adhesive with an excellent open time and terrific sag resistance.

**Type 1™**

**Professional Tile Adhesive**

*Type 1* is a professional-grade, traditional, nonflammable, acrylic adhesive for setting glazed and unglazed ceramic and porcelain tiles on walls, floors and countertops. This adhesive is used for interior applications only.

ISO 13007 D2TE



|                              | Product Code | Packaging                   |
|------------------------------|--------------|-----------------------------|
| <b>U.S./</b>                 | 7010021      | Pail: 5 U.S. gals. (18,9 L) |
| <b>Canada</b>                | 7010200      | Drum: 55 U.S. gals. (208 L) |
| <small>Special Order</small> |              |                             |

|               | Product Code | Packaging                     |
|---------------|--------------|-------------------------------|
| <b>Canada</b> | 90791000     | Pail: 1 U.S. qt. (946 mL)     |
|               | 90753000     | Pail: 1 U.S. gal. (3,79 L)    |
|               | 90763000     | Pail: 3.5 U.S. gals. (13,2 L) |

ISO 13007 D1TE



|               | Product Code | Packaging                     |
|---------------|--------------|-------------------------------|
| <b>U.S./</b>  | 1040010      | Pail: 1 U.S. qt. (946 mL)     |
| <b>Canada</b> | 1040011      | Pail: 1 U.S. gal. (3,79 L)    |
|               | 1040016      | Pail: 3.5 U.S. gals. (13,2 L) |







ANSI A136.1, Type 1

**Ker® 909**

**Professional Tile Adhesive**

*Ker 909* is a ready-to-use, nonflammable, high-viscosity, synthetic polymer emulsion-based adhesive. *Ker 909* is used for residential and light commercial interior installations of wall tiles up to 8" x 8" (20 x 20 cm), and interior residential floor and countertop tile up to 6" x 6" (15 x 15 cm). *Ker 909* also has a minimal odor, making it ideal for tile installations in confined or restricted areas.



ANSI A118.3

**Kerapoxy® CQ**

**Premium Epoxy Grout and Mortar with Color-Coated Quartz**

*Kerapoxy CQ* is an improved, two-component, 100%-solids epoxy grout and mortar. Nonsagging/nonslumping in joints up to 3/8" (10 mm), water-cleanable and easy to apply, *Kerapoxy CQ* uses a proprietary aggregate to achieve its durable color, making it excellent for countertops, high-traffic areas, and areas needing stain and chemical resistance. Easy to maintain, *Kerapoxy CQ* will clean to the original color and contains BioBlock® technology to help protect against mold and mildew.




ANSI A118.3



**Kerapoxy® IEG CQ**

**100%-Solids, Industrial-Grade Epoxy Grout with Color-Coated Quartz**


*Kerapoxy IEG CQ* is a water-cleanable, 100%-solids epoxy grout with high chemical and stain resistance. It is a nonshrinking, nonsagging, fast-curing, efflorescence-free grout. Color-coated quartz dramatically improves its cleanability, so that *Kerapoxy IEG CQ* leaves very little film residue during cleanup of excess grout with a grout float. The color-coated quartz also prevents pigment bleed, so tiles are not stained during installation. This grout is perfectly suited for use in commercial kitchens, meat packing houses, and any commercial or institutional floors that require daily cleaning with enzymatic cleaners. *Kerapoxy IEG CQ* is ideal for applications where high-strength, mold- and mildew-resistant grout joints are required. In addition, it has high temperature resistance and can be steam-cleaned.

ISO 13007 D1TE 

|               | Product Code         | Packaging  |
|---------------|----------------------|--|
| <b>U.S.</b>   | 90963000             | Pail: 3.5 U.S. gals. (13,2 L)                                |
| <b>Canada</b> | 90968021<br>90963021 | Pail: 5 U.S. gals. (18,9 L)<br>Pail: 3.5 U.S. gals. (13,2 L) |

ISO 13007 R2/RG  

|               | Product Code | Packaging             |
|---------------|--------------|-----------------------|
| <b>U.S./</b>  | 4xx92*       | 1 U.S. qt. (946 mL)   |
| <b>Canada</b> | 4xx52*       | 1 U.S. gal. (3,79 L)  |
|               | 4xx59*       | 2 U.S. gals. (7,57 L) |

ISO 13007 RG 

|               | Product Code | Packaging |
|---------------|--------------|-----------|
| <b>U.S./</b>  | 49936        | Large kit |
| <b>Canada</b> |              |           |

\* For the "XX" portion of the product code, use the two-digit number of the desired caulk color.





ANSI A118.3



ANSI A118.6 and ANSI A118.7



ANSI A118.6

**Kerapoxy®**

**Premium Epoxy Grout and Mortar**

*Kerapoxy* is a premium-grade, water-cleanable, 100%-solids, high-strength epoxy mortar and chemical-resistant nonsagging grout. Available in all MAPEI colors for grouting, *Kerapoxy* is excellent for countertops, high-traffic areas, and areas needing stain and chemical resistance.

**Ultracolor® Plus**

**Premium, Rapid-Setting Sanded Grout with Polymer**

*Ultracolor Plus* is an ultra premium, fast-setting, polymer-modified, color-consistent, nonshrinking, efflorescence-free grout for joint widths from 1/16" to 1" (1,5 mm to 2,5 cm). *Ultracolor Plus* is specially formulated with MAPEI's High-Hydrated Cement Technology (HCT™) to eliminate the common problems related to Portland-cement grout, such as color consistency and efflorescence. HCT, along with higher polymer content, reduces absorption and increases stain resistance when compared with standard-performance cement grouts.

**Keracolor® S**

**Premium Sanded Grout with Polymer**

*Keracolor S* is a premium-grade, pre-blended, polymer-modified sanded Portland-cement tile grout that requires only the addition of water for mixing. It will grout joints from 1/8" to 5/8" (3 to 16 mm).

ISO 13007 R2/RG



Packaging (Liquid Unit)

|               |          |                            |
|---------------|----------|----------------------------|
| <b>U.S./</b>  | 35xx018* | Kit: 1 U.S. qt. (946 mL)   |
| <b>Canada</b> | 34xx018* | Kit: 1 U.S. gal. (3,79 L)  |
|               | 39xx901* | Kit: 2 U.S. gals. (7,57 L) |

\* For the "XX" portion of the product code, use the two-digit number of the desired caulk color.

ISO 13007 CG2WAF



Product Code Packaging

|               |           |                        |
|---------------|-----------|------------------------|
| <b>U.S./</b>  | 6xx10000* | Bag: 10 lbs. (4,54 kg) |
| <b>Canada</b> | 6xx25000* | Bag: 25 lbs. (11,3 kg) |

\* For the "XX" portion of the product code, use the two-digit number of the desired caulk color.

ISO 13007 CG2WA



Product Code Packaging

|               |        |                        |
|---------------|--------|------------------------|
| <b>U.S./</b>  | 2xx10* | Bag: 10 lbs. (4,54 kg) |
| <b>Canada</b> | 27xx5* | Bag: 25 lbs. (11,3 kg) |

\* For the "XX" portion of the product code, use the two-digit number of the desired caulk color.






ANSI A118.6

**Keracolor® U**

**Premium Unsanded Grout with Polymer**

*Keracolor U* is a premium-grade, pre-blended, polymer-modified unsanded Portland-cement tile grout that requires only the addition of water for mixing. It will grout joints from 1/16" to 1/8" (1,5 to 3 mm).

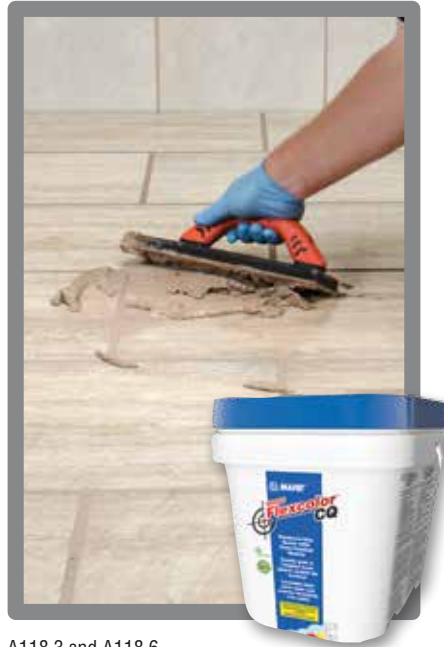

A118.3 and A118.6

**MAPEI Flexcolor™ CQ**

**Ready-to-Use Grout with Color-Coated Quartz**

*MAPEI Flexcolor CQ* is a professional-grade, ready-to-use specialty grout for precision commercial and residential installations with porcelain, ceramic and natural-stone tiles. *MAPEI Flexcolor CQ* can be used to grout interior/ exterior tile, and its nonporous composition helps to prevent water-based stains by providing water repellency to the grout surface. *MAPEI Flexcolor CQ* is formulated with the latest innovation in quartz aggregate, which ensures color consistency, ease of cleanability and improved workability. In addition, this grout can be used on sensitive tile surfaces once tested, requires no sealer and cures naturally from evaporation of the low level of water in the formulation.



**Premixed Grout**

*Premixed Grout* is a premixed stain-resistant grout for ceramic, porcelain and natural-stone tile in residential light-duty interior installations, such as walls, floors, countertops and showers.

ISO 13007 CG2WA



|               | Product Code | Packaging              |
|---------------|--------------|------------------------|
| <b>U.S./</b>  | 8xx10*       | Bag: 10 lbs. (4,54 kg) |
| <b>Canada</b> | 8xx25*       | Bag: 25 lbs. (11,3 kg) |

\* For the "XX" portion of each product code, use the two-digit number of the desired grout color.

|               | Product Code | Packaging                    |
|---------------|--------------|------------------------------|
| <b>U.S./</b>  | 5XX01*       | Pail: 1 U.S. gal. (3,79 L)   |
| <b>Canada</b> | 5XX02*       | Pail: 2 U.S. gals. (7,57 L)  |
|               | 4KA00xx02*   | Pail: 0.5 U.S. gal. (1,89 L) |

\* For the "XX" portion of each product code, use the two-digit number of the desired grout color.

|               | Product Code | Packaging              |
|---------------|--------------|------------------------|
| <b>U.S./</b>  | 5xx77*       | 0.5 U.S. gal. (1,89 L) |
| <b>Canada</b> | 5xx47*       | 1 U.S. gal. (3,79 L)   |

\* For the "XX" portion of each product code, use the two-digit number of the desired grout color.







**Premixed Mortar**

**Ready-to-Use Mortar**

*Premixed Mortar* is a premixed, no-mess alternative to traditional thin-set mortars that require water and mixing. It is nonflammable and ready to use.

|               | Product Code | Packaging               |
|---------------|--------------|-------------------------|
| <b>U.S./</b>  | 14853        | 1 U.S. gal. (3.79 L)    |
| <b>Canada</b> | 14863        | 3.5 U.S. gals. (13.2 L) |



**Keracaulk® S**

**Premium, Sanded Siliconized Acrylic Caulk**

*Keracaulk S* is a premium-grade, easy-to-use, easy-to-clean, siliconized, sanded acrylic caulk formulated to match all of MAPEI's grout colors.

|               | Product Code | Packaging                         |
|---------------|--------------|-----------------------------------|
| <b>U.S./</b>  | 3xx10*       | Cartridge: 10.5 U.S. oz. (311 mL) |
| <b>Canada</b> |              |                                   |

\* For the "XX" portion of each product code, use the two-digit number of the desired grout color.

**Keracaulk® U**

**Premium, Unsanded Siliconized Acrylic Caulk**

*Keracaulk U* is a premium-grade, easy-to-use, easy-to-clean, siliconized, unsanded acrylic caulk formulated to match all of MAPEI's grout colors.

|               | Product Code | Packaging                         |
|---------------|--------------|-----------------------------------|
| <b>U.S./</b>  | 9xx10*       | Cartridge: 10.5 U.S. oz. (311 mL) |
| <b>Canada</b> |              |                                   |

\* For the "XX" portion of each product code, use the two-digit number of the desired grout color.



**Mapesil™ T**

**100%-Silicone Sealant for Heavy Traffic and Movement Joints**

*Mapesil T* is a professional-grade, 100%-silicone sealant for use on multiple substrates. This product is specifically formulated for heavy traffic and expansion/movement joints exceeding both ASTM and ANSI standards.

|               | Product Code | Packaging                         |
|---------------|--------------|-----------------------------------|
| <b>U.S./</b>  | 3BT00xx91    | Cartridge: 10.1 U.S. oz. (299 mL) |
| <b>Canada</b> |              |                                   |

\* For the "XX" portion of each product code, use the two-digit number of the desired grout color.





# Take MAPEI with you.

*Download our free mobile app.*



Grouts and Mortar

Caulks

Whether you're using a smartphone or a tablet, you can quickly access the MAPEI information you need via the MAPEI app. Explore product listings, technical data sheets and more – and easily email the data to yourself or a colleague. The app also gives locations where MAPEI products are sold, MAPEI's grout color palettes, and easy links for MAPEI's technical support and customer care.

Get the app today at your online Android or Apple app store (search for "MAPEI").



Android and Apple are third-party trademarks.





The **MAPEI Technical Institute (MTI)** provides the highest-quality, basic product knowledge with demonstrations and hands-on training to architects, contractors, installers and distributors in 9 locations: Deerfield Beach (FL), San Bernardino (CA), Garland (TX), Dalton (GA), West Chicago (IL) and Swedesboro (NJ), all in the USA; and Laval (Quebec), Brampton (Ontario) and Delta (British Columbia), all in Canada.



#### MTI-TV – Technical Services Videos on the Web

Through a series of online videos, Technical Services Director Dan Marvin and National Technical Presenter Sam Biondo discuss issues of interest to contractors and installers. During the discussion, demonstrations are shown of MAPEI products that can meet challenges such as preparing substrates for self-leveling, applying self-levelers, and installing tile and stone with the proper mortars and grouts that best meet the requirements of a specific project.

Installments of the MTI-TV videos can be seen on the MAPEI Americas Websites and YouTube channel. The videos are available in English, French and Spanish.

For registration information on U.S. seminars, please contact Sophia D'Amico-Campbell at (954) 246-8555.

For registration information on Canadian seminars, please contact Raffaolina Aceto at (450) 662-1212.

THE WORLD OF



**TILE & STONE** INSTALLATION SYSTEMS



**FLOOR COVERING** INSTALLATION SYSTEMS



PRODUCTS FOR **WOOD FLOORING**



**CONCRETE RESTORATION** SYSTEMS



PRODUCTS FOR **STRUCTURAL STRENGTHENING**



PRODUCTS FOR **UNDERGROUND CONSTRUCTION**



**ADMIXTURES** FOR **CONCRETE**



**BELOW-GRADE WATERPROOFING** SYSTEMS



**GRINDING AIDS** FOR **CEMENT**



**Headquarters of the Americas**  
1144 East Newport Center Drive  
Deerfield Beach, FL 33442

**Customer Service**  
1-800-42-MAPEI (1-800-426-2734)

**Technical Services**  
1-800-992-6273 (U.S. and Puerto Rico)  
1-800-361-9309 (Canada)

**Services in Mexico**  
0-1-800-MX-MAPEI  
(0-1-800-696-2734)

#### **NORTH AMERICA**

##### **United States**

Arizona  
California  
Florida  
Georgia  
Illinois  
Minnesota  
Missouri  
New Jersey  
Texas  
Virginia

##### **Canada**

British Columbia  
Ontario  
Quebec

##### **Mexico**

#### **SOUTH AMERICA/CARIBBEAN/ CENTRAL AMERICA**

Argentina  
Panama  
Puerto Rico  
Venezuela

#### **EUROPE**

Austria  
Belgium  
Benelux  
Bulgaria  
Croatia  
Czech Republic  
Denmark  
Finland  
France  
Germany  
Greece  
Hungary  
Italy  
Luxembourg  
Netherlands  
Norway  
Poland  
Portugal  
Romania  
Russia  
Slovakia  
Slovenia  
Spain  
Sweden  
Switzerland  
Turkey  
Ukraine  
United Kingdom

#### **ASIA/OCEANIA**

United Arab  
Emirates  
Australia  
China  
Hong Kong  
India  
Malaysia  
New Zealand  
Singapore  
South Korea  
Vietnam

#### **AFRICA**

Egypt  
South Africa



# Tile & Stone Installation Systems



Keyword: MAPEI Americas

## MAPEI Headquarters of the Americas

1144 East Newport Center Drive  
Deerfield Beach, Florida 33442  
1-888-US-MAPEI (1-888-876-2734)/  
(954) 246-8888

## Technical Services

1-800-992-6273 (U.S. and Puerto Rico)  
1-800-361-9309 (Canada)

## Customer Service

1-800-42-MAPEI (1-800-426-2734)

## Services in Mexico

0-1-800-MX-MAPEI (0-1-800-696-2734)

Copyright ©2016 by MAPEI Corporation ("MAPEI") and all rights are reserved. All intellectual property rights and other information contained in this document are the exclusive property of MAPEI (or its parent or related companies), unless otherwise noted. No part of this document may be reproduced or transmitted in any form without the prior written consent of MAPEI.

**Edition Date:** December 1, 2015

PR: 7610 MKT: 15-2077 Printed in the USA.

